

JC10 Rec'd PCT/PTO 22 FEB 2002

Practitioner's Docket No. HMN 2 0020

CHAPTER II

Preliminary Classification:

Proposed Class:

Subclass:

NOTE: "All applicants are requested to include a preliminary classification on newly filed patent applications. The preliminary classification, preferably class and subclass designations, should be identified in the upper right-hand corner of the letter of transmittal accompanying the application papers, for example 'Proposed Class 2, subclass 129.' " M.P.E.P., § 601, 7th ed.

**TRANSMITTAL LETTER
TO THE UNITED STATES ELECTED OFFICE (EO/US)
(ENTRY INTO U.S. NATIONAL PHASE UNDER CHAPTER II)**

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/EP00/06199	03 July 2000 (03.07.00)	23 August 1999 (23.08.99)
TITLE OF INVENTION		
METHOD FOR A BURNER AND A CORRESPONDING DEVICE		
APPLICANT(S)		
DURST, Franz; KUNZEL, Jorgen		

Box PCT
Assistant Commissioner for Patents
Washington D.C. 20231
ATTENTION: EO/US

CERTIFICATION UNDER 37 C.F.R. §§ 1.8(a) and 1.10*
*(When using Express Mail, the Express Mail label number is mandatory;
Express Mail certification is optional.)*

I hereby certify that, on the date shown below, this correspondence is being:

MAILING

☒ deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

37 C.F.R. § 1.8(a)

37 C.F.R. § 1.10 *

☐ with sufficient postage as first class mail.

☒ as "Express Mail Post Office to Addressee"

Mailing Label No. EV 020234044 US (mandatory)

TRANSMISSION

☐ facsimile transmitted to the Patent and Trademark Office, (703) _____

Date: 2/22/02

Signature Georgeen B. George

Georgeen B. George

(type or print name of person certifying)

* Only the date of filing (§ 1.6) will be the date used in a patent term adjustment calculation, although the date on any certificate of mailing or transmission under § 1.8 continues to be taken into account in determining timeliness. See § 1.703(f). Consider "Express Mail Post Office to Addressee" (§ 1.10) or facsimile transmission (§ 1.6(d)) for the reply to be accorded the earliest possible filing date for patent term adjustment calculations.

(Transmittal Letter to the United States Elected Office (EO/US) [13-18]—page 1 of 9)

JC13 Rec'd PCT/PTO 2 2 FEB 2002

NOTE: To avoid abandonment of the application, the applicant shall furnish to the USPTO, not later than 20 months from the priority date: (1) a copy of the international application, unless it has been previously communicated by the International Bureau or unless it was originally filed in the USPTO; and (2) the basic national fee (see 37 C.F.R. § 1.492(a)). The 30-month time limit may not be extended. 37 C.F.R. § 1.495.

WARNING: Where the items are those which can be submitted to complete the entry of the international application into the national phase are subsequent to 30 months from the priority date the application is still considered to be in the international state and if mailing procedures are utilized to obtain a date the express mail procedure of 37 C.F.R. § 1.10 must be used (since international application papers are not covered by an ordinary certificate of mailing—See 37 C.F.R. § 1.8.

NOTE: Documents and fees must be clearly identified as a submission to enter the national state under 35 U.S.C. § 371 otherwise the submission will be considered as being made under 35 U.S.C. § 111. 37 C.F.R. § 1.494(f).

- I. Applicant herewith submits to the United States Elected Office (EO/US) the following items under 35 U.S.C. § 371:
- a. ☒ This express request to immediately begin national examination procedures (35 U.S.C. § 371(f)).
 - b. ☒ The U.S. National Fee (35 U.S.C. § 371(c)(1)) and other fees (37 C.F.R. § 1.492) as indicated below:

(Transmittal Letter to the United States Elected Office (EO/US) [13-18]—page 2 of 9)

10/069261
JG13 Rec'd PCT/PTO 22 FEB 2002

2. Fees

CLAIMS FEE	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
<input checked="" type="checkbox"/> *	TOTAL CLAIMS	20 -20=	0	× \$18.00=	\$ ---
	INDEPENDENT CLAIMS	2 -3=	0	× \$84.00=	---
	MULTIPLE DEPENDENT CLAIM(S) (if applicable) + \$280.00				
BASIC FEE**	<input type="checkbox"/> U.S. PTO WAS INTERNATIONAL PRELIMINARY EXAMINATION AUTHORITY Where an international preliminary examination fee as set forth in § 1.482 has been paid on the international application to the U.S. PTO: <input type="checkbox"/> and the international preliminary examination report states that the criteria of novelty, inventive step (non-obviousness) and industrial activity, as defined in PCT Article 33(1) to (4) have been satisfied for all the claims presented in the application entering the national stage (37 C.F.R. § 1.492(a)(4)) \$100.00 <input type="checkbox"/> and the above requirements are not met (37 C.F.R. § 1.492(a)(1)) \$710.00 <input checked="" type="checkbox"/> U.S. PTO WAS NOT INTERNATIONAL PRELIMINARY EXAMINATION AUTHORITY Where no international preliminary examination fee as set forth in § 1.482 has been paid to the U.S. PTO, and payment of an international search fee as set forth in § 1.445(a)(2) to the U.S. PTO: <input type="checkbox"/> has been paid (37 C.F.R. § 1.492(a)(2)) \$740.00 <input type="checkbox"/> has not been paid (37 C.F.R. § 1.492(a)(3)) \$1040.00 <input checked="" type="checkbox"/> where a search report on the international application has been prepared by the European Patent Office or the Japanese Patent Office (37 C.F.R. § 1.492(a)(5)) \$890.00				890.00
	Total of above Calculations				= 890.00
SMALL ENTITY	Reduction by 1/2 for filing by small entity, if applicable. Assertion must be made. (note 37 C.F.R. § 1.27)				- 0
	Subtotal				890.00
	Total National Fee				\$ 890.00
	Fee for recording the enclosed assignment document \$40.00 (37 C.F.R. § 1.21(h)). (See Item 13 below). See attached "ASSIGNMENT COVER SHEET".				---
TOTAL	Total Fees enclosed				\$ 890.00

*See attached Preliminary Amendment Reducing the Number of Claims.

- ☒ Attached is a ☒ check ☐ money order in the amount of \$ 890.00
- ☒ Authorization is hereby made to charge the amount of \$ 0
- ☒ to Deposit Account No. 06-0308
- ☐ to Credit card as shown on the attached credit card information authorization form PTO-2038.

WARNING: Credit card information should **not** be included on this form as it may become public.

- ☒ Charge any additional fees required by this paper or credit any overpayment in the manner authorized above.

A duplicate of this paper is attached.

****WARNING:** "To avoid abandonment of the application the applicant shall furnish to the United States Patent and Trademark Office not later than the expiration of 30 months from the priority date: * * * (2) the basic national fee (see § 1.492(a)). The 30-month time limit may not be extended." 37 C.F.R. § 1.495(b).

WARNING: If the translation of the international application and/or the oath or declaration have not been submitted by the applicant within thirty (30) months from the priority date, such requirements may be met within a time period set by the Office. 37 C.F.R. § 1.495(b)(2). The payment of the surcharge set forth in § 1.492(e) is required as a condition for accepting the oath or declaration later than thirty (30) months after the priority date. The payment of the processing fee set forth in § 1.492(f) is required for acceptance of an English translation later than thirty (30) months after the priority date. Failure to comply with these requirements will result in abandonment of the application. The provisions of § 1.136 apply to the period which is set. Notice of Jan. 3, 1993, 1147 O.G. 29 to 40.

☐ **Assertion of Small Entity Status**

☐ **Applicant hereby asserts status as a small entity under 37 C.F.R. § 1.27.**

NOTE: 37 C.F.R. § 1.27(c) deals with the assertion of small entity status, whether by a written specific declaration thereof or by payment as a small entity of the basic filing fee or the fee for the entry into the national phase as states:

"(c) Assertion of small entity status. Any party (person, small business concern or nonprofit organization) should make a determination, pursuant to paragraph (f) of this section, of entitlement to be accorded small entity status based on the definitions set forth in paragraph (a) of this section, and must, in order to establish small entity status for the purpose of paying small entity fees, actually make an assertion of entitlement to small entity status, in the manner set forth in paragraphs (c)(1) or (c)(3) of this section, in the application or patent in which such small entity fees are to be paid.

(1) Assertion by writing. Small entity status may be established by a written assertion of entitlement to small entity status. A written assertion must:

- (i) Be clearly identifiable;
- (ii) Be signed (see paragraph (c)(2) of this section); and
- (iii) Convey the concept of entitlement to small entity status, such as by stating that applicant is a small entity, or that small entity status is entitled to be asserted for the application or patent. While no specific words or wording are required to assert small entity status, the intent to assert small entity status must be clearly indicated in order to comply with the assertion requirement.

(2) Parties who can sign and file the written assertion. The written assertion can be signed by:

- (i) One of the parties identified in §§ 1.33(b) (e.g., an attorney or agent registered with the Office), §§ 3.73(b) of this chapter notwithstanding, who can also file the written assertion;
- (ii) At least one of the individuals identified as an inventor (even though a §§ 1.63 executed oath or declaration has not been submitted), notwithstanding §§ 1.33(b)(4), who can also file the written assertion pursuant to the exception under §§ 1.33(b) of this part; or
- (iii) An assignee of an undivided part interest, notwithstanding §§ 1.33(b)(3) and 3.73(b) of this chapter, but the partial assignee cannot file the assertion without resort to a party identified under §§ 1.33(b) of this part.

(Transmittal Letter to the United States Elected Office (EO/US) [13-18]—page 4 of 9)

10/069261
JC13 Rec'd PCT/PTO 22 FEB 2002

(3) Assertion by payment of the small entity basic filing or basic national fee. The payment, by any party, of the exact amount of one of the small entity basic filing fees set forth in §§ 1.16(a), (f), (g), (h), or (k), or one of the small entity basic national fees set forth in §§ 1.492(a)(1), (a)(2), (a)(3), (a)(4), or (a)(5), will be treated as a written assertion of entitlement to small entity status even if the type of basic filing or basic national fee is inadvertently selected in error.

(i) If the Office accords small entity status based on payment of a small entity basic filing or basic national fee under paragraph (c)(3) of this section that is not applicable to that application, any balance of the small entity fee that is applicable to that application will be due along with the appropriate surcharge set forth in §§ 1.16(e), or §§ 1.16(f).

(ii) The payment of any small entity fee other than those set forth in paragraph (c)(3) of this section (whether in the exact fee amount or not) will not be treated as a written assertion of entitlement to small entity status and will not be sufficient to establish small entity status in an application or a patent."

3. ☒ A copy of the International application as filed (35 U.S.C. § 371(c)(2)):

NOTE: Section 1.495 (b) was amended to require that the basic national fee and a copy of the international application must be filed with the Office by 30 months from the priority date to avoid abandonment. "The International Bureau normally provides the copy of the international application to the Office in accordance with PCT Article 20. At the same time, the International Bureau notifies applicant of the communication to the Office. In accordance with PCT Rule 47.1, that notice shall be accepted by all designated offices as conclusive evidence that the communication has duly taken place. Thus, if the applicant desires to enter the national stage, the applicant normally need only check to be sure the notice from the International Bureau has been received and then pay the basic national fee by 30 months from the priority date." Notice of Jan. 7, 1993, 1147 O.G. 29 to 40, at 35-36. See item 14c below.

- a. ☒ is transmitted herewith.
- b. ☐ is not required, as the application was filed with the United States Receiving Office.
- c. ☒ has been transmitted
 - i. ☒ by the International Bureau.

Date of mailing of the application (from form PCT/1B/308):

: 01.03.01

- ii. ☐ by applicant on _____. (Date)

4. ☒ A translation of the International application into the English language (35 U.S.C. § 371(c)(2)):

- a. ☒ is transmitted herewith.
- b. ☐ is not required as the application was filed in English.
- c. ☐ was previously transmitted by applicant on _____. (Date)
- d. ☐ will follow.

5. ☒ Amendments to the claims of the International application under PCT Article 19 (35 U.S.C. § 371(c)(3)):

NOTE: The Notice of January 7, 1993 points out that 37 C.F.R. § 1.495(a) was amended to clarify the existing and continuing practice that PCT Article 19 amendments must be submitted by 30 months from the priority date and this deadline may not be extended. The Notice further advises that: "The failure to do so will not result in loss of the subject matter of the PCT Article 19 amendments. Applicant may submit that subject matter in a preliminary amendment filed under section 1.121. In many cases, filing an amendment under section 1.121 is preferable since grammatical or idiomatic errors may be corrected." 1147 O.G. 29-40, at 36.

- a. ☐ are transmitted herewith.
b. ☐ have been transmitted
i. ☐ by the International Bureau.

Date of mailing of the amendment (from form PCT/1B/308):

- ii. ☐ by applicant on _____. (Date)
c. ☒ have not been transmitted as
i. ☒ applicant chose not to make amendments under PCT Article 19.
Date of mailing of Search Report (from form PCT/ISA/210.):
27.11.00
ii. ☐ the time limit for the submission of amendments has not yet expired. The amendments or a statement that amendments have not been made will be transmitted before the expiration of the time limit under PCT Rule 46.1.

6. ☒ A translation of the amendments to the claims under PCT Article 19 (38 U.S.C. § 371(c)(3)):

- a. ☐ is transmitted herewith.
b. ☐ is not required as the amendments were made in the English language.
c. ☒ has not been transmitted for reasons indicated at point 5(c) above.

7. ☒ A copy of the international examination report (PCT/IPEA/409)

- ☒ is transmitted herewith.
☐ is not required as the application was filed with the United States Receiving Office.

8. ☐ Annex(es) to the international preliminary examination report

- a. ☐ is/are transmitted herewith.
b. ☐ is/are not required as the application was filed with the United States Receiving Office.

9. ☐ A translation of the annexes to the international preliminary examination report

- a. ☐ is transmitted herewith.
b. ☐ is not required as the annexes are in the English language.

(Transmittal Letter to the United States Elected Office (EO/US) [13-18]—page 6 of 9)

JC13 Rec'd PCT/PTO 22 FEB 2002

10. ☒ An oath or declaration of the inventor (35 U.S.C. § 371(c)(4)) complying with 35 U.S.C. § 115
- a. ☐ was previously submitted by applicant on _____. (Date)
 - b. ☐ is submitted herewith, and such oath or declaration
 - i. ☐ is attached to the application.
 - ii. ☐ identifies the application and any amendments under PCT Article 19 that were transmitted as stated in points 3(b) or 3(c) and 5(b); and states that they were reviewed by the inventor as required by 37 C.F.R. § 1.70.
 - c. ☒ will follow.

II. Other document(s) or information included:

11. ☒ An International Search Report (PCT/ISA/210) or Declaration under PCT Article 17(2)(a):
- a. ☒ is transmitted herewith.
 - b. ☒ has been transmitted by the International Bureau.
Date of mailing (from form PCT/IB/308): 01.03.01
 - c. ☐ is not required, as the application was searched by the United States International Searching Authority.
 - d. ☐ will be transmitted promptly upon request.
 - e. ☐ has been submitted by applicant on _____. (Date)
12. ☒ An Information Disclosure Statement under 37 C.F.R. §§ 1.97 and 1.98:
- a. ☒ is transmitted herewith.

Also transmitted herewith is/are:

- ☒ Form PTO-1449 (PTO/SB/08A and 08B).
 - ☒ Copies of citations listed.
 - b. ☐ will be transmitted within THREE MONTHS of the date of submission of requirements under 35 U.S.C. § 371(c).
 - c. ☐ was previously submitted by applicant on _____. (Date)
13. ☐ An assignment document is transmitted herewith for recording.
- A separate ☐ "COVER SHEET FOR ASSIGNMENT (DOCUMENT) ACCOMPANYING NEW PATENT APPLICATION" or ☐ FORM PTO 1595 is also attached.

14. ☒ Additional documents:

- a. ☒ Copy of request (PCT/RO/101)
- b. ☒ International Publication No. WO 01/14249 A1
 - i. ☐ Specification, claims and drawing
 - ii. ☐ Front page only
- c. ☒ Preliminary amendment (37 C.F.R. § 1.121)
- d. ☒ Other

PCT/IB/301

PCT/IB/304

PCT/IB/332

15. ☒ The above checked items are being transmitted

- a. ☒ before 30 months from any claimed priority date.
- b. ☐ after 30 months.

16. ☐ Certain requirements under 35 U.S.C. § 371 were previously submitted by the applicant on _____, namely:

AUTHORIZATION TO CHARGE ADDITIONAL FEES

WARNING: Accurately count claims, especially multiple dependant claims, to avoid unexpected high charges if extra claims are authorized.

NOTE: "A written request may be submitted in an application that is an authorization to treat any concurrent or future reply, requiring a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time. An authorization to charge all required fees, fees under § 1.17, or all required extension of time fees will be treated as a constructive petition for an extension of time in any concurrent or future reply requiring a petition for an extension of time under this paragraph for its timely submission. Submission of the fee set forth in § 1.17(a) will also be treated as a constructive petition for an extension of time in any concurrent reply requiring a petition for an extension of time under this paragraph for its timely submission." 37 C.F.R. § 1.136(a)(3).

NOTE: "Amounts of twenty-five dollars or less will not be returned unless specifically requested within a reasonable time, nor will the payer be notified of such amounts; amounts over twenty-five dollars may be returned by check or, if requested, by credit to a deposit account." 37 C.F.R. § 1.26(a).

☒ Please charge, in the manner authorized above, the following additional fees that may be required by this paper and during the entire pendency of this application:

☒ 37 C.F.R. § 1.492(a)(1), (2), (3), and (4) (filing fees)

WARNING: Because failure to pay the national fee within 30 months without extension (37 C.F.R. § 1.495(b)(2)) results in abandonment of the application, it would be best to always check the above box.

(Transmittal Letter to the United States Elected Office (EO/US) [13-18]—page 8 of 9)

☐ 37 C.F.R. § 1.492(b), (c) and (d) (presentation of extra claims)

NOTE: Because additional fees for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency (37 C.F.R. § 1.492(d)), it might be best not to authorize the PTO to charge additional claim fees, except possible when dealing with amendments after final action.

☒ 37 C.F.R. § 1.17 (application processing fees)

☒ 37 C.F.R. § 1.17(a)(1)–(5) (extension fees pursuant to § 1.136(a).

☐ 37 C.F.R. § 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. § 1.311(b))

NOTE: Where an authorization to charge the issue fee to a deposit account has been filed before the mailing of a Notice of Allowance, the issue fee will be automatically charged to the deposit account at the time of mailing the notice of allowance. 37 C.F.R. § 1.311(b).

NOTE: 37 C.F.R. § 1.28(b) requires "Notification of any change in loss of entitlement to small entity status must be filed in the application . . . prior to paying, or at the time of paying . . . issue fee." From the wording of 37 C.F.R. § 1.28(b): (a) notification of change of status must be made even if the fee is paid as "other than a small entity" and (b) no notification is required if the change is to another small entity.

☐ 37 C.F.R. § 1.492(e) and (f) (surcharge fees for filing the declaration and/or filing an English translation of an International Application later than 30 months after the priority date).



SIGNATURE OF PRACTITIONER

Scott A. McCollister

(type or print name of practitioner)

Fay, Sharpe, Fagan, Minnich & McKee, LLP

1100 Superior Avenue, Seventh Floor

P.O. Address

Cleveland, OH 44114-2518

Reg. No.: 33,961

Tel. No.: (216) 861-558

Customer No.:

10/069261

JC13 Rec'd PCT/PTO 2 2 FEB 2002

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF : DURST, Franz et al.
FOR : **METHOD FOR A BURNER AND
A CORRESPONDING DEVICE**
SERIAL NO. : Unknown
FILED : Herewith
ATTORNEY DOCKET NO. : HMN 2 0020

Cleveland, Ohio 44114-2518
February 22, 2002

PRELIMINARY AMENDMENT

Assistant Commissioner For Patents
Washington, D.C. 20231

Dear Sir:

Prior to calculation of the filing fee and substantive examination of the above-referenced patent application, Applicants respectfully request amendment of the application as follows. A clean copy of the claims appears below and a marked-up version is attached as an appendix.

IN THE CLAIMS:

1. Method for a burner for combustion of a fuel/oxidant mixture inside a combustion chamber, in which a material is provided that endures a maximum temperature which is lower than the combustion temperature of the fuel/oxidant mixture, characterized in that prior to combustion an additional gas is added, which, essentially, does not contribute to the combustion, such as an inert gas or steam, or the exhaust gas from the combustion or from after-combustion, by means of which the temperature is lowered during combustion to a value below the maximum temperature.

2. Method according to Claim 1, characterized in that the fuel/oxidant mixture and the additionally supplied gas are mixed, at least in part, in a pre-mix device which is up-stream from the burner.
3. Device comprising a burner for combustion of a fuel/oxidant mixture within a combustion chamber in which a material is provided which endures a maximum temperature, with one or several supply lines for the fuel as well as the oxidation agent, in order to conduct these into the combustion chamber, characterized in that said combustion device with combustion temperature of fuel/oxidant mixture above the maximum temperature is designed in that at least one additional supply line is provided, by means of which an additional gas, specifically of low combustion value, can be supplied, whereby the temperature during combustion can be lowered to a value below the maximum temperature.
4. Device according to Claim 3, characterized in that the combustion product from the combustion chamber is introduced, at least in part, via a supply line as additional gas, by means of which the temperature can be lowered during combustion.
5. Device according to Claim 3, characterized in that a pre-mix chamber is provided for the fuel/oxidant mixture, in which the fuel and the oxidant mixture can be mixed before combustion.
6. Device according to Claim 5, characterized in that the pre-mix chamber is designed in such manner that in direction towards the combustion chamber, the flow velocity component of the mixture is greater in the pre-mix chamber than the flame velocity in the combustion chamber.

7. Device according to Claim 5, characterized in that the pre-mix chamber is also supplied with additional gas by means of which the combustion temperature can be lowered, so as to mix same with the fuel/oxidant mixture, preferably by mixing with fuel or oxidant before the pre-mix chamber.
8. Device according to Claim 5, characterized in that the size of the lateral surfaces in proportion to the volume of the pre-mix chamber is selected in such manner that the side wall is able to accommodate, should the situation arise, the free energy from detonation.
9. Device according to Claim 5, characterized by cooling of the pre-mix chamber.
10. Device according to Claim 3, characterized in that there is provided in the combustion chamber a porous material with inter-connected hollow spaces suitable in size for flame development.
11. Device according to Claim 10, characterized by a porous material with inter-connected hollow spaces whose porosity changes over to larger pores in the direction toward the development of flame, with resulting critical Péclet number for the pore size at an inner border area, above which flame development takes place and below which flame development is suppressed.
12. Device according to Claim 11, characterized in that the combustion chamber has at least two zones with material of differing pore size, between which, pore size provides the critical Péclet number.

13. Device according to Claim 10, characterized in that the material with inter-connected hollow spaces presents, at least in part, bulk volume of bodies as they are utilized for systematic packings in thermal separation methods, such as spheres or shell bodies.
14. Device according to Claim 13 having a border area for zones of differing porosity comprised of a material of differing pore size, between which, pore size provides the critical Péclet number, characterized in that a grid is provided at the border area, like a grate in order to prevent discharge of the bodies from one zone into the other.
15. Device according to Claim 14, characterized in that the grid, in particular the grate is cooled.
16. Device according to Claim 3, characterized in that the combustion chamber is designed for flame stability in case of over- and/or under-pressure.
17. Device according to Claim 1, characterized in that a combustion chamber insulation is provided for nearly adiabatic combustion control with thermal wall effects.
18. Device according to Claim 1, characterized by a fixture for obtaining or segregating reaction products from the combusted fuel/oxidation agent.

VERSION WITH MARKINGS TO SHOW CHANGES MADE

1. Method for a burner for combustion of a fuel/oxidant mixture [(1)] inside a combustion chamber, in which a material [(3, 3', 3'', 3''')] is provided that endures a maximum temperature which is lower than the combustion temperature of the fuel/oxidant mixture, characterized in that prior to combustion an additional gas is added, which, essentially, does not contribute to the combustion, such as an inert gas or steam, or the exhaust gas from the combustion or from after-combustion, by means of which the temperature is lowered during combustion to a value below the maximum temperature.
2. Method according to Claim 1, characterized in that the fuel/oxidant mixture and the additionally supplied gas are mixed, at least in part, in a pre-mix device [(5)] which is up-stream from the burner [(1)].
3. Device comprising a burner for combustion of a fuel/oxidant mixture within a combustion chamber in which a material [(3, 3', 3'', 3''')] is provided which endures a maximum temperature, with one or several supply lines [(25, 26)] for the fuel as well as the oxidation agent, in order to conduct these into the combustion chamber, characterized in that said combustion device with combustion temperature of fuel/oxidant mixture above the maximum temperature is designed in that at least one additional supply line [(30)] is provided, by means of which an additional gas, specifically of low combustion value, can be supplied, whereby the temperature during combustion can be lowered to a value below the maximum temperature.

4. Device according to Claim 3, characterized in that the combustion product from the combustion chamber is introduced, at least in part, via a supply line [(30)] as additional gas, by means of which the temperature can be lowered during combustion.
5. Device according to Claim 3 [or 4], characterized in that a pre-mix chamber [(5)] is provided for the fuel/oxidant mixture, in which the fuel and the oxidant mixture can be mixed before combustion.
6. Device according to Claim 5, characterized in that the pre-mix chamber [(5)] is designed in such manner that in direction towards the combustion chamber, the flow velocity component of the mixture is greater in the pre-mix chamber [(5)] than the flame velocity in the combustion chamber.
7. Device according to Claim 5 [or 6], characterized in that the pre-mix chamber [(5)] is also supplied with additional gas by means of which the combustion temperature can be lowered, so as to mix same with the fuel/oxidant mixture, preferably by mixing with fuel or oxidant before the pre-mix chamber [(5)].
8. Device according to [one of Claims 5 to 7] Claim 5, characterized in that the size of the lateral surfaces in proportion to the volume of the pre-mix chamber [(5)] is selected in such manner that the side wall is able to accommodate, should the situation arise, the free energy from detonation.
9. Device according to [at least one of Claims 5 to 8] Claim 5, characterized by cooling of the pre-mix chamber [(5)].

10. Device according to [one of Claims 3 to 9] Claim 3, characterized in that there is provided in the combustion chamber a porous material [(3, 3', 3", 3''')] with inter-connected hollow spaces suitable in size for flame development.
11. Device according to Claim 10, characterized by a porous material [(3, 3', 3", 3''')] with inter-connected hollow spaces whose porosity changes over to larger pores in the direction toward the development of flame, with resulting critical Péclet number for the pore size at an inner border area, above which flame development takes place and below which flame development is suppressed.
12. Device according to Claim 11, characterized in that the combustion chamber has at least two zones [(A, C)] with material [(3, 3', 3", 3''')] of differing pore size, between which, pore size provides the critical Péclet number.
13. Device according to [one of Claims 10 to 12] Claim 10, characterized in that the material [(3, 3', 3", 3''')] with inter-connected hollow spaces presents, at least in part, bulk volume of bodies as they are utilized for systematic packings in thermal separation methods, such as spheres or shell bodies.
14. Device according to Claim 13 having a border area for zones of differing porosity [according to Claim 12] comprised of a material of differing pore size, between which, pore size provides the critical Péclet number, characterized in that a grid is provided at the border area, like a grate [(13)] in order to prevent discharge of the bodies from one zone into the other.
15. Device according to Claim 14, characterized in that the grid, in particular the grate [(13)] is cooled.

Method for a Burner and a Corresponding Device

The invention relates to a method for a burner for combustion of a fuel/oxidant mixture within a combustion chamber, in which a material is provided which endures a maximum temperature, said temperature being lower than the combustion temperature of the fuel/oxidant mixture. The invention further relates to a device with a burner for combustion of a fuel/oxidant mixture within a combustion chamber, in which a material is provided which endures a maximum temperature, with one or several supply lines for the fuel and for the oxidant, in order to introduce these into the combustion chamber. In addition, the invention relates to applications for the method and/or applications of the device.

It is the goal of most burner applications to attain, among others, the most effective combustion possible in order to achieve the maximum degree of efficiency. However, the temperature limit is usually restricted by the temperature resistance of the available burner material.

Temperatures higher than permitted by the available materials occur in particular with strong exothermal chemical reaction, such as during the synthesis of intermediate or end products. Such chemical reactions are frequently performed with freely burning flame, which burns far remote from the combustion material.

In addition, with these exothermal chemical reactions there exist, depending upon the properties of the employed materials, specifically designed reactors comprising one or several burner units and a combustion chamber. Since, however, the employed materials and the products frequently present highly toxic and corrosive properties, such reactors must be designed according to particularly strict safety requirements, which constitutes significant limitation with respect to the

selection of material.

The following description deals mainly with synthesis of hydrochloric acid, in which chlorine and hydrogen are reacted with each other. If mention is frequently made in this text of the synthesis of hydrochloric acid, it is not intended to be limitative but only exemplary. The represented principles can be transferred to all similar reactions, in particular such reactions where high temperatures may develop.

With the synthesis of hydrochloric acid, the reaction chamber, in principle, is a diffusion flame, which is located in an expanded combustion chamber. Relatively simple devices are used as burners which are made of corrosion-resistant materials and comprise an inner and an outer pipe. The chlorine-containing gases are supplied via the inner pipe, which frequently presents a specifically designed burner head. The hydrogen-containing gases, however, are introduced through a free annular gap between the pipes, so that the hydrogen practically envelopes the chlorine-containing gases. The two gases only come into contact directly after exit from the burner, they react with each other and form a long flame which expands in the combustion chamber.

Thorough mixing of the reactants in the flame takes mainly place by diffusion. Because of the high combustion temperatures, the walls of the combustion chamber need to be away as far as possible. In addition, these walls are cooled in most instances.

This, however, produces a great disadvantage with this type of combustion, because the outer regions of such flame cool down to such extent from heat transfer to the cooled walls, that the

conversion of the reactants takes place only slowly or comes to a stop. Under certain circumstances this results in unreacted chlorine within the formed hydrochloric acid during exit of the hot combustion gases from the combustion chamber. The percentage of the unreacted chlorine is therefore reduced by providing a hydrogen excess ranging between 5 and 10%.

It is desirable with this type of applications, in particular with synthesis of hydrochloric acid, to attain higher flame stability. The usual physical parameters for adjustment, however, are highly restricted. With under-pressure, for example, the stability of the flame declines, - its expansion clearly increases. Combustion at higher pressures, however, is not customary practice up to now. Also, specifically designed pre-mix burners cannot be employed due to the danger of flame backfire without self-ignition of the mixture of chlorine and hydrogen.

Another topic to be addressed here is the disposal of noxious gas. A customary specific embodiment of a chemical reactor for disposal of noxious matter is a hot combustion chamber lined with refractory materials, in which the combustion gases are brought to reaction with traditional burners. The noxious gases to be disposed of are passed into a combustion chamber with the aid of a separate supply line. The combustion chamber is dimensioned in such manner that a certain minimum dwell time exists with high temperature for final combustion of reaction gases. Such devices are preferably employed for after-combustion of chlorine-containing compounds or exhaust gases. The minimum dwell time generally determines the size of such combustion chambers. It is true, however, that with better mixing and more intensive heat, the size can be reduced.

The above cited discourse demonstrates that such fixtures can only be manufactured with

maintenance of a certain minimum size, in other words, the fixtures usually occupy a great deal of space. For example, in the catalog of Messrs. SGL-TECHNIK GmbH. Apparatebau, Werner von Siemens Straße 18, DE-86405 Meitingen, an HCL-Synthesis Oven is shown on page 3, from which it is apparent from the size of persons depicted in the same figure that its approximate size is over 10 m long. Said length should be able to be drastically reduced.

It is the object of the invention to improve a method and a device of the initially mentioned type in such manner that the thus developed apparatuses and/or burners occupy less space. In addition, a device is to be created for said method, by means of which it is possible for example, to perform the above-mentioned exothermal chemical reactions while lessening the drawbacks described in more detail above.

Based on the initially mentioned method, the object of the invention is solved in that prior to combustion, an additional gas is introduced, which does not significantly contribute to the combustion, such as an inert gas or water vapor or the exhaust gas from combustion or after-combustion, by means of which the temperature during combustion can be reduced to a value which is below the maximum temperature. In this respect, at least one additional supply line is provided for a device, by means of which an additional gas having an especially low combustion value, can be supplied, thus making it possible to reduce the temperature during combustion to a value below the maximum temperature.

This simple route for solving the object, namely reducing the temperature with the aid of an additional gas, initially does not appear to be particularly effective. Quite the contrary was true, however. In particular, it was demonstrated that based on the invention and its corresponding

improvements, a fixture for hydrochloric acid synthesis, for example, can be manufactured having a length of less than one meter. Said result, namely drastic reduction of the length from almost 15 m to less than 1 m, should have been totally unexpected when posing the object.

With traditional measures, it also would have been practically unattainable by a person skilled in the art, that is to say, switching in parallel several low output hydrochloric acid synthesis plants in order to reduce the length.

The invention is based on the knowledge that with lowering the temperature via addition of an additional gas for cooling, the expenditure for exterior cooling is not only greatly reduced, but the distance between flame/wall can also be kept significantly shorter.

In addition, other burner types than the previously named diffusion burners can also be employed, which, likewise, facilitate further shortening. It is expected that with respect to hydrochloric acid synthesis, based on the invention, it is possible to operate with lower hydrogen excess, inasmuch as the temperature gradients which occur according to the state of the art, are significantly lower and through-mixing is better. This increases the economic efficiency of such fixtures.

In addition, there is also the benefit that based on capability to adjust the amount of the supplied inert gas, it is possible to control or regulate the temperature. This possibility can also be used, for example, to regulate the temperature of the fuel/oxidant mixtures with respect to lowest possible exhaust gas emissions.

With respect to a preferred improvement of the device, there is provision for the combustion

product to be passed from the combustion chamber, at least in part, via a supply line as additional gas, by means of which the temperature can be lowered during combustion.

It is then not only possible to obtain a reduced temperature, but there also takes place after-combustion of the exhaust gases, which will, under certain circumstances, significantly reduce the noxious matter contents. In addition, it should be emphasized that no specific special gases need to be introduced into the combustion chamber, since exhaust gas will always be present. The expenditure for such a device is therefore reduced.

According to another improvement of the invention with respect to the method, provision is made for mixing, at least in part, the fuel/oxidant mixture and the additionally supplied gas in a pre-mix device, which is up-stream from the burner. A corresponding device according to this improvement is characterized in that it has a pre-mix chamber for the fuel/oxidant mixture from which said fuel/oxidant mixture flows into the combustion chamber.

As is apparent from the preceding, a premix chamber according to the state of the art is clearly not possible, since the combustion gases must be conducted separately from each other until they exit from the two pipes, since otherwise there is the risk of backfire. Also, the available materials in a chlorine acid synthesis, for example, will not withstand, in case of backfire, the contact with a flame, based on the high temperatures. The premix chamber employed according to the improvement permits significantly better through-mixing and more effective conversion of the reactants, which makes possible, for example, lowering the required hydrogen percentage in the synthesis of hydrochloric acid.

With use of traditional burners, self-ignition of the hydrochloric acid mixture in the premix

chamber would also present problems. The influence of UV radiation on gas in the premix chamber can be reduced by appropriate design. UV radiation could otherwise lead to ignition in the premix chamber of the mentioned gas mixture of chlorine and hydrogen.

In particular, with beneficial refinement of the invention, provision is made that the premix chamber is designed in such manner that in the direction to the combustion chamber the proportionate component of the flow velocity of the mixture is greater in the premix chamber than the flame velocity in the combustion chamber.

As a result, the premix chamber is dimensioned in such manner that any potentially developing flame in the premix chamber will be extinguished, in case of unintentional ignition in the entire operating region, for example, during start-up.

In particular, it is possible to thereby also supply the premix chamber with the additional gas by means of which the combustion temperature can be lowered, in order to mix same with the fuel/oxidant. Thus, the additional gas is also actively mixed, thereby attaining effective cooling and uniform temperature within the flame.

According to another refinement of the invention, provision is made that the size of the lateral surface in relation to the volume of the premix chamber is selected in such manner that, if needed, it is able to accommodate the free energy from an explosion.

Here again, it is possible, with simple means, to attain a high safety standard.

Another pertinent improvement is achieved in a refinement of the invention by means of cooling

the premix chamber.

It should be noted that a premix chamber according to the above mentioned improvements constitutes a benefit of the invention, which had thus far been excluded with other exothermal chemical reactions based on the restriction imposed by the there employed technique.

To fully mix the gases in the premix chamber, the gases are blown in at high speed, preferably tangentially. The velocity of the gas mixture in axial direction is selected by means of flame velocity of the mixture. In order to improve the mixing, built-ins may be provided in the premix chamber, for example commercially available mixing elements, as employed in static mixing units.

The inventively supplied inert gas, i.e. the additional gas for lowering the flame velocity and for reducing the adiabatic combustion temperature is ad-mixed to the principal reaction gases, preferably before the premix chamber, so that it is impossible, to have significantly higher flame velocities appear at any location within the premix chamber than in the ideally pre-mixed gas mixture.

According to another beneficial improvement, provision is made for a porous material in the combustion chamber, said porous material having interconnected large hollow spaces suitable for flame development.

In particular, the porosity of the porous material with interconnected hollow spaces changes over to larger pores in the direction of flame development, resulting in a critical Péclet number for pore size at an inner border area, above which flame development takes place, and below which

formation of flame is suppressed.

Embodiment possibilities for such pore burners, as they are called in the following, have been described in several articles in the technical literature, for example in Durst et al - Bulletin SEV/VSE, Volume 89, No. 21, pages 11-18, 1998. Further details may also be learned from EP0 657 011 B1. Such burners could thus far not be employed in the combustion of chemically intensive exothermal reactions, since the material could not withstand the high temperatures.

The construction size of such fixtures and devices can be significantly reduced with the use of pore burners, with equal through-put and product quality. In addition, the faulty flame stability of known fixtures and devices which occurs with pressure fluctuations and in particular with under-pressure is significantly improved.

Combustion stabilization is attained by increasing the pore size in flow direction, whereby a critical Péclet number for the pore size results in one zone of the porous material, above which there is development of flame, and below which the flame development is suppressed.

Application of said technique for preparation of chemical products, such as, for example, hydrochloric acid, or for after-combustion of noxious gases, such as, for example, chlorine-containing gases, does not only have a beneficial effect upon the combustion itself, but permits also beneficial design and arrangement of those parts of the fixture into which the pore burner is integrated.

With a pore burner, the reaction is performed within a porous matrix of temperature-resistant

material. In contrast to conventional burner devices, it is not necessary to arrange the burner in a voluminous combustion chamber or to arrange same down-stream. The hot reaction products flow from the burner itself without direct flame formation.

A pore burner of the conventional design is not suitable for hydrochloric reaction or other chemical reactions utilized in the chemical industry without the inventively employed lowering of the flame temperature. Furthermore, in comparison to the known applications in heating technology, there occur significantly higher combustion chamber temperatures and the gases are highly corrosive.

Dimensioning of pore burners for industrial chemical plants is, however, initially done according to similar rules as described in Patent Specification EP 0 657 011 B1, whereby the Péclet number Pe is used as criterion for dimensioning the layered pore sizes according to the following formula:

$$Pe = \frac{S_L d_m c_p P_G}{\lambda_G}$$

with

S_L	standing for the laminary combustion velocity of the
	eventually pre-mixed gases
D_m	standing for the effective pore diameter
λ_f	standing for thermal conductance of the gas mixture
P_f	standing for the density of the gas mixture and

c_p standing for the specific heat capacity of the gas mixture

The combustible gas mixture first flows through one region - designated in the following by Zone A, which is characterized by pore diameters of such small effect that no stationary flame expansion is possible. In other words, the first porous zone is similar in its effect to a flame backfire block. The next following combustion zone proper - hereinafter called Zone C, does however, present pore sizes which are large enough to permit stationary combustion. As criterion for flame expansion in the interior of a porous matrix is mentioned a critical Péclet number of $Pe > 65$, according to the technical literature - for example Babkin et al, Combustion and Flame, Vol. 87, S. 182 - 190, 1991).

It is suggested in EP 0 657 011 B1 that a clearly lower Péclet number than $Pe = 65$ be employed for the first zone and a clearly higher Péclet number than $Pe = 65$ for the combustion zone.

If the pore burner is ignited, the combustion stabilizes itself at the intersection between the two zones. As a result of the small pore dimension in the first zone, there will be no combustion in said region in stationary condition but only pre-heating of the gas mixture. This property satisfies the strict safety requirements relative to back fire hazard in chemical plants.

Based on the excellent heat transfer between the gas- and solid body phase within the porous matrix, these are approximately in thermal equilibrium. The almost thermal equilibrium between gas- and solid body phase and the intensive intermixing within the pore body essentially causes the disappearance of free flames in the combustion zone equipped with larger pores. The

combustion process now takes place in an expanded reaction region, which can more appropriately be characterized as combustion reactor than as combustion chamber with free flames.

It is possible to utilize as porous combustion chamber charge materials for pore burners of industrial chemical plants, materials such as for example aluminum oxide, circonium oxide, silicium carbide, graphite, carbon etc., which, aside from high temperature resistance, also present adequate resistance to corrosion. For preparation of the porous combustion chamber, the following are preferably employed: temperature resistant ceramic pellets in bulk volume, also shell bodies and similar bodies as they are employed, for example as random packing for thermal separation methods - - even though foam structures or honeycomb structures may also be utilized. Bulk volumes are preferred because they permit simple cleaning of deposits, for example the salt residues which form during the synthesis of hydrochloric acid; said deposits originating from the combustion gases because these may, under certain circumstances, carry along salt-laden drops of fluid. According to EP 0 657 011 B1, to produce hydrochloric acid, zones of varying pore structure and/or pore size are arranged for the pore burners. This is done by utilizing filling bodies of different sizes for Zones A and C.

In deviation from the embodiment described in EP 0 657 011 B1, it is possible to arrange a grid between the porous structures formed by the filling bodies in the two zones having different pore sizes, preferably a grate, which prevents the discharge of smaller sized filling bodies from Zone A into the inter-spaces of the larger filling bodies of Zone C. At the gas exit from Zone C another gas-permeable grate is arranged for those burners where gases do not exit vertically in upward direction, said grate closes the combustion chamber. As a result it is possible to arrange the burner in any random position despite the loose bulk of filling bodies.

The porous reaction chamber is preferably encased by a corrosion-fast, cooled wall, which consists, for example, of artificial resin-impregnated graphite. Cooling can be effected by cooling water, by air or by the combustion gases themselves. Between the cooled wall and the combustion chamber is then preferably located an insulating intermediate layer of high temperature-resistant, corrosion-resistant and thermally insulating materials, which prevent loss of heat and which ensure that the specified combustion chamber temperature prevails at each location in the combustion chamber. In deviation to EP0 657 011 B1, this heavy insulation permits nearly adiabatic process control, without any temperature influence on the combustion process as a result of the cooled wall. The adiabatic process control permits, for example, simple scale-up of such chemical reactors since heat transport properties are irrelevant to the cooled walls and the entire process in flow direction can be regarded nearly one dimensional.

The adiabatic combustion temperature of several chemical reactions, as with hydrogen and chlorine reactions, lies above 2500° C. Conventional, sufficiently corrosion-resistant ceramic materials for filling the combustion chamber do not withstand these high temperatures. The proposed measure according to the invention solves the problem of the excessively high combustion chamber temperature by addition of another gas or of steam. Accordingly, another stream of gas is mixed to the combustion gas mixture in the premix chamber or to each of the combustion gases. Said gas stream may be, for example, a partial stream of the reaction product, for example, hydrochloric acid, from another part of the process-engineered facility. It is also possible to employ water vapor or another preferred inert gas with respect to the subsequent reaction, which permits lowering the combustion chamber temperature to the desired level. The lowering of the combustion temperature is all the more important since the heat supply, based on the cooled wall, plays a subordinated role for pore burners which are being dimensioned for high output. Due to the return gas and/or outside gas, the flame velocity is, additionally, lowered, so

that the combustion in the entire output region can take place only in Zone C of the pore burner.

Particularly beneficial is the return of the reaction product, since the exhaust gas volume of the facility is not thereby increased. Water vapor is also beneficial in this respect, because the water vapor can be condensed several times in the down-stream devices for manufacture of end products, such as, for example, hydrochloric acid. The principal reactants like hydrogen and chlorine frequently contain - if they originate, for example, from chemical conversions in process-engineered plants - such high percentages of outside gases that an addition of further outside or return gases becomes superfluous, and/or that for technical control reasons only a certain amount needs to be added so that the reaction is stabilized at the desired temperature.

In deviation to the conventional burner designs for chemical plants, such as for hydrochloric syntheses, where the mixing of combustion gases takes place outside the burner and within the combustion chamber, the combustion gases are premixed in the here described device. In deviation from EP 0 651 011 V1, the premix chamber is preferably part of and a safety-relevant component of an inventive device.

The premix chamber is preferably made of corrosion-proof materials, for example of artificial resin impregnated graphite. The premixed gases preferably enter from the premix chamber through a grate of corrosion-resistant material, for example silicon carbide, aluminum oxide etc. into Zone A of the pore burner. As already previously addressed, several chemical reactants, such as chlorine and hydrogen tend to self-ignite under the influence of UV radiation. Self-ignition in the premix chamber, however, should be avoided for reasons of safety. A grate of suitable design and a corresponding design of Zone A is selected in such manner that from Zone A and/or Zone C no UV radiation or only very little UV radiation will get into the premix

chamber, which might lead to ignition of the gas mixture of chlorine and hydrogen in the premix chamber.

The stability of the combustion with respect the described pore burner should be particularly emphasized. As opposed to the hydrochloric acid burners designed according to the state of the art, which react very sensitively to fluctuations in pressure and volume, where, in fact, the flame can easily be extinguished, the combustion reaction in the pore burner, even with short-term cut-off of one of the gases, is immediately ignited by means of the thermal capacity of the filling bodies in Zone C. For safety reasons, however, it is appropriate to also shut off the other gas when one of the gases cuts out and to undertake a subsequent inert gas rinse. Even after several minutes have elapsed, it is possible to begin, without delay, operating the burner without another start-up procedure, including after inert gas rinse.

Ignition and preheating of the burner can be done with a combustion gas (hydrogen, methane etc.) and air. It is true, however, that a conventional ignition device traditionally employed for such chemical reactions may also be used for that purpose. After thorough pre-warming of Zone C, it is possible to gradually or even immediately switch over to the reactants, such as for example chlorine and hydrogen.

In case of hydrochloric acid synthesis and pre-warming with a hydrogen/air flame, beneficial regulation occurs in such fashion that the percentage of air is slowly reduced and the chlorine percentage increased in equal measure until the air is totally replaced by chlorine.

Sudden load fluctuations between 50 and 120% of nominal load, which may occur in facilities of

this type can easily be handled without any difficulties with the described pore burners.

The excellent stability of the combustion reaction in the pore burner permits use of the burner under pressure or under under-pressure, which according to the state of the art has thus far not been done with sufficient process safety, based on the unstable flames, in particular in the synthesis of hydrochloric acid. For greater outputs, pore burners can be equipped with correspondingly larger cross sectional surface or can be switched in parallel in optional number. Such arrangement of many small burners significantly increases the performance range of a facility for hydrochloric acid synthesis, inasmuch as burners can be switched on or off in such an arrangement, depending upon the performance requirements. In this manner, it is possible to always run the overall configuration within optimal performance range. Likewise, contrary to the here represented examples, it is possible to design the burners as line burners or ring burners. One then obtains nearly unchanged conditions within the combustion chambers.

Scale-up for technical fixtures is surprisingly easy, based on the technical teaching for the dimensioning of pore burners, in particular with the previously described adiabatic process control, according to which defined flow conditions must be maintained in Zones A and C, independent of construction size.



The pore burners described in the following, which have been modified for chemical processes, are components of technically engineered facilities for the manufacture of hydrochloric acid or for after-combustion of chlorine-containing compounds. Such plant presents, for example, a modified pore burner, a heat exchanger for the cooling of the reaction products and/or for exploitation of thermal contents and, depending upon the type of facility, it also has an absorber, a scrubber or exhaust gas washer at transitional pieces between the apparatuses, pumps, pipe

lines and the conventional safety, measuring and control devices.

Based on execution of reaction and good through-mixing of gases in the pore burner, no voluminous combustion chamber is needed, compared with the state of the art. The burner can be directly connected with the succeeding apparatuses, for example a heat exchanger, a quenching unit with absorber or other apparatuses. Following cool-down of the reaction products streaming from the burner in a heat exchanger or after [passage through] a quenching unit, a partial stream of the cooled-down gas and/or gas mixture is again supplied to the burner, as described above. Alternatively, as described, another gas can also be added, for example water vapor.

Depending upon the requirements of the product, only portions of the process-engineered facility might be needed, for example burner and gas cooler or burner and quenching unit, depending upon whether the product is needed in the form of gas or dissolved in water as hydrochloric acid.

Another specific embodiment of a facility for production of hydrochloric acid uses carburetted hydrogen gas as supplier of hydrogen, for example natural gas, methane, propane, etc., chlorine and air. Combustion then takes place according to reaction equations (1 and 2) depicted in highly simplified fashion:



This combustion is difficult to perform in facilities according to the state of the art, since carbon black may be formed under unfavorable conditions, which will dirty up the facility and the acid. The described particular properties of the pore burner make possible, and rather unexpectedly, stable, soot-free combustion for this critical application.

Pore burners for the after-combustion of halogen-containing exhaust gases of evaporable or gaseous halogen-containing organic compounds are performed, as will later be explained in more detail later on, in that oxidants and combustion gases, preferably pre-mixed, are blown into the pre-mix chamber. Due to the high reaction enthalpy of oxidants and combustion gas, a stable support flame is generated in the combustion Zone C. The subsequently to be burned gas or gas mixtures is blown by means of an intake pipe into the pre-mix chamber, preferably via a grate from Zone A of the pore burner and is mixed with the fuel/oxidant mixture. For control of temperature of the after-combustion process one preferably utilizes a corresponding surplus of the oxidant, in particular air. For control of the temperature in Zone C of the pore burner, the temperature is measured with an infra-red pyrometer, for example, and the signal for the oxidant control is processed further. Down-stream devices for after-combustions differ from the above described components, depending upon halogen contents of exhaust gases. With small halogen content, where preparation of hydrochloric acid is not the first priority, generally only a quenching unit and a washer is arranged down-stream. Other by-products, such as sulphur compounds and similar can likewise be subjected to non-harmful elimination. Inasmuch as the after-combustion fixtures with pore burners do not require a combustion chamber in the traditional sense, it is possible to design such facilities in highly compact size and at favorable cost.

The following preferred improvements of the invention result on the basis of the preceding detailed explanations:

- the burner has at least two zones with material of different pore size, between which the pore size provides the critical Péclet number;
- the material with coherent hollow spaces presents, at least in part, bulk volume of bodies, as utilized for solid body bulk volume or orderly packings in thermal separation processes, such as spheres or shell bodies;
- at the border area for zones of differing porosity is provided a grid or a grate in order to avoid discharge of bodies from one zone into the other, whereby the grid, in particular the grate, may also be cooled;
- the combustion chamber is designed for flame stability with over- and under-pressure.

The combustion chamber can now also be designed for flame stability with over- or under-pressure, which would have lead in the formerly known state of the art to only insufficient flame stability. Based on the invention and its improvements there is now available a significantly larger pressure range, so that a corresponding design for a larger pressure range may result in significant increase in flame stability in a fashion known to a person skilled in the art, specifically also with respect to over- or under-pressure. Controls can thus largely be eliminated.

In particular, in a preferred improvement of the invention, provision is made for a combustion chamber insulation for a nearly adiabatic combustion control without wall effects. An adiabatic

combustion control is particularly beneficial for increasing the reaction rate.

Detrimentially, said adiabatic combustion control without wall effects was completely impossible with the aforementioned burners.

In addition to combustion, it is also possible to obtain reaction products, for example with the hydrochloric acid combustion of hydrochloric acid synthesis. To that end, for a preferred improvement of the invention, it is provided that the fixture has a device for obtaining or for separating the reaction products from the combusted fuel/oxidant. In particular, with respect to the hydrochloric acid synthesis, provision is made that the device is designed for a chlorine-containing compound in the fuel as well as hydrogen in the oxidant for combustion of the hydrochloric acid and that it has, for that purpose, a process-engineered device for obtaining hydrochloric acid or muriatic acid behind the combustion chamber. The cited design is known to the expert. In particular, notice should be taken that the corresponding safety devices are taken into account and that the materials have the appropriate corrosion resistant properties vis-a-vis chlorine.

As has been outlined above, the invention cannot only be used for hydrochloric acid synthesis, but also as device for after-combustion of exhaust gases, and in particular for cleaning purposes. Thus it is for example possible with respect to some of the exemplary embodiments represented in the description which follows to undertake, without any problem, after-combustion of portions of organic compounds and to thus harmlessly dispose of same.

Further measures and particular features of the invention become apparent from the description of the exemplary embodiments which follow, making reference to the appended drawing:

- Fig. 1 depicts a pore burner of artificial resin-impregnated graphite with borings for water-cooling at the graphite casing;
- Fig. 1a depicts a section of a pore burner according to Fig. 1, but with static mixing elements in the pre-mix chamber;
- Fig. 2 depicts a pore burner as in Fig. 1, but without pre-mix chamber;
- Fig. 2a depicts a section through Zone A of the burner according to Fig. 2 for illustration of the mixture;
- Fig. 3 depicts a pore burner according to Fig. 1 with casing cooled by the combustion gas and orderly packing of combustion chamber filling;
- Fig. 4 depicts a pore burner with a cooling casing made of steel;
- Fig. 4a depicts a section through the pre-mix chamber with tangential entry stub for the gases;
- Fig. 5 depicts a pore burner for after-combustion of exhaust gases by means of a fuel gas/air mixture;
- Fig. 6 depicts a process-engineered facility for production of hydrochloric acid with pore burner, heat exchanger, absorber, scrubber and product return;
- Fig. 7 depicts a process-engineered facility for after-combustion of chlorine-containing or chlorinated hydrocarbon-containing exhaust gases with pore burner, quenching unit and washing unit.

For the following exemplary embodiments, a special type of burner was selected, i.e. the previously already more thoroughly discussed pore burner 1, which presents particular benefits in comparison with other burner types. The essential characteristic of the invention consists in

that the flame is cooled by supply of an additional gas to the fuel/oxidant mixture, which can be realized with respect to all conceivable burner types.

Therefore, the description of exemplary embodiments which follows is not to be regarded as limitation on the basis of pore burner 1 alone. A general exemplary embodiment of a pore burner 1 for chemical processes is represented in Fig. 1.

The housing of pore burner 1 consists of artificial resin-impregnated graphite and is traversed by cooling channels 2, which transport cooling agents, for example, cooling water.

In addition, two zones are depicted, Zone A and C, defined by sphere-shaped filling bodies. Zone C acts as combustion zone in which the flame develops. By appropriate dimensioning, ignition is avoided in Zone A. The combustion zone C is filled for that purpose with larger sphere-shaped filling bodies 3 -- Zone A, on the other hand, is filled with smaller sphere-shaped filling bodies 3'.

In a lower section are gas inlet channels 6, which issue tangentially into the pre-mix chamber 5, as is depicted, in detail, in Fig. 3a. Due to the tangential supply, effective mixing takes place by means of swirling.

In addition, a condensate outlet 7 is provided at the pre-mix chamber whose position - depending upon the installation position of burner 1, is established in downward direction, so that the condensate is able to run off. The pre-mix chamber 5 can, furthermore, contain, depending upon need, static mixing elements 10, as they can be seen in detail in Fig. 1a, as segment of Fig. 1.

Attorney Docket No. HMN 2 0020

In order to simplify cleaning, the lower portion 4 is detachably attached at the housing of pore burner 1 by means of an attachment device 8.

In order to achieve an essentially adiabatic combustion, the combustion chamber C is thermally screened off against the cooled housing wall of the pore burner 1 by means of a ceramic insulation 9.

At the gas exit 11, the combustion chamber C is topped with a grate 12, which prevents that filling bodies can fall out of the pore burner 1 in case of other than vertical installation.

Another grate 13 between the Zones A and C prevents that small filling bodies of Zone A are blown into the intermediate spaces of the filling bodies of Zone C. Grate 14, which can likewise be seen in Fig. 1, separates the pre-mix chamber 5 from Zone A. In the combustion chamber wall of pore burner 1 and the isolation 9, a continuous opening 15 is provided for measuring the temperature and an opening 16 in order to ignite the mixture. In order to lower the flame temperature to less than maximum temperature, at which temperature the spheres will not melt, an additional gas is supplied to the pre-mix chamber, such as water vapor, exhaust gas from the combustion or another type of gas.

Figure 2 depicts a pore burner, which operates in the same manner as the burner of Fig. 1. In contrast to the burner of Fig. 1, no pre-mix chamber is provided here. The gases are introduced by means of lines 6 directly into Zone A. Pervasion of spaces between the spheres 3' leads to highly uniform distribution, so that the gases introduced into Zone A via supply line 6 mix with one another very well. As is apparent from Fig. 2a, the supply lines 6 present a multitude of

holes, which mainly take care of uniform distribution at the bottom of the pore burner and, if dimensioned sufficiently small, can prevent flame backfire into lines 6.

In addition, two of the combustion gases, for example Cl_2 and H_2 are carried in separate lines 6, which are laterally at a distance from Zone A and are introduced from opposite sides, so that no accidental mixing can take place in the proximity of the principal supply, for example due to leaks, which might lead to an explosion, somewhere.

Fig. 3 depicts another specific embodiment, in which the combustion gases themselves provide for cooling and corresponding heat transfer. The hydrogen is initially conducted for that purpose through cooling channels of the combustion chamber wall of pore burner 1, before entering through an inlet channel 6 in the under-section 4 into the pre-mix chamber, as is indicated by arrows on the left and right hand side of Fig. 3. The chlorine enters through another gas inlet channel 6. An outside gas is blown into the pre-mix chamber 5 through additional gas inlet channels 6, as can be seen in detail in Fig. 4a. In this specific embodiment, the design of the insulation should be adapted to the heat absorption capability of the hydrogen.

In this example, the combustion chamber C is filled with a structured packing 3", by means of which there is improvement in the mixing of the reaction partners compared with the sphere packing according to Fig 1. Such packings 3' are particularly appropriate for those instances where no solid substances are contained in the gases, such as carbon black.

Fig. 4 depicts another exemplary embodiment of a pore burner 1, which is encased by a graphite wall, which is surrounded by a water-cooled casing 17 of steel. The graphite wall of the pore burner 1 does not need, in this case, any interior cooling channels because of the high thermal

conductivity of carbon.

The cooling water enters at the stub 18 into the casing space 19 of the steel casing 17 and leaves same again through a stub 20. The pore burner represented in Fig. 4 is equipped with ceramic fill body rings 3''' (to demonstrate another design relative to Zone 5) - said rings present a cylindrical shape with inner structures. By means of such structures, the surface is raised, mainly relative to the example of Fig. 1.

Fig. 4a depicts, by way of example, the location of the entry stub 6 for the pre-mix chamber 5.

Combustion gases and inert gases are preferably supplied to peripherally consecutive entry stubs 6, in order to lower the flame velocity of the mixtures, for example hydrogen at 6', chlorine at 6'' and circulating gases at 6''' . Condensates can exit from the pre-mix chamber at stub 7.

Fig. 5 shows a pore burner 1 for after-combustion of chlorine-containing gases. It differs from the in Fig. 1 described specific embodiment by a modified pre-mix chamber 5, into which issues a generously dimensioned gas entry channel 21, through which flow the pre-mixed gases, air as oxidant and fuel. A gas inlet pipe 22, through which is conducted the subsequently to be combusted exhaust gas, also projects into the pre-mix chamber 5. The gas inlet pipe 22 is fitted with borings 23 at its casing surface, through which the exhaust gas to be subsequently combusted, enters into the pre-mix chamber 5 and mixes with the fuel gas stream which flows around the pipe. The condensate outlet 7 is in this case laterally arranged, in contrast to the representations of Figures 1 - 3. The pre-mix chamber 5 widens below Zone A to the same cross-section as the one of Zone C. Said widening affords an increase in the possible gas load of the burner.

Fig. 6 depicts a simplified diagram of a facility for the production of hydrochloric acid, into which is integrated a pore burner 1, for example of the type according to Fig. 3. The combustion gases, hydrogen and chlorine are in this arrangement fed into a pore burner 1 via supply lines 25, 26. The reaction products get from the pore burner via a line 27 into a heat exchanger 28 for cool-down. The heat exchanger can be cooled, for example, with cooling water. Alternatively, however, heat utilization is also possible in that hot water or low pressure steam is generated there for further utilization.

From the cooled-down gases exiting from the heat exchanger, a portion is segregated via a line 29 and passed to the fuel/oxidant mixture via a supply line 30 in front of the burner. Temperature regulation takes place by means of a corresponding measuring station 31 and a temperature -controlled valve 32.

The other portion of the gases gets, via a line 33, into a drop foil absorber 34, for example, in which hydrochloric gas is absorbed in water or diluted muriatic acid and withdrawn from the stub 35. The washer, designed here as drop foil absorber 34, can be operated by direct current, as represented, or also by opposite current. The non-absorbable and insignificant portions of hydrochloric gas then get into an after-wash unit 36, in which the remaining portions of hydrochloric gas are washed out by means of fresh water supplied via line 37. The washing water enriched with hydrochloric gas is beneficially utilized as absorption liquid for the absorption unit and returned for that reason.

Figure 7 depicts another schematic representation of a facility which can be employed, for example, for post-combustion of chlorine-containing compounds and exhaust gases having low chlorine contents from other fixtures or components of fixtures.

An exhaust gas with chlorine-containing components supplied via a line 40 is post-combusted in a pore burner 1 by means of a support flame from natural gas and air supplied via lines 38 and 39. The combustion temperature of the pore burner 1 is controlled in this example with the aid of additional air via a valve 41, if the cooling effect of the subsequently to be combusted gas supplied via line 40 is insufficient, or if it has a heating value that needs to be considered. Needless to say, other gases, for example inert gases or steam, can also be supplied for regulation of temperature, if the extreme parameters so require. If the combustion temperature is lower than the specified target value, the heat output needs to be increased by supply of natural gas.

The exhaust gases can be passed to an exhaust heat exploitation unit in a heat exchanger not represented here, or they can be quenched directly as is frequently the case with small facilities. After quenching, the chilled gases reach a washer 42, in which the exhaust gases are initially washed with circulating fluid, then with fresh water supplied via line 37. A portion of the wash water is subjected to further processing. This, however, is not indicated in the drawing.

The purified exhaust gas escapes from a line 43, while diluted hydrochloric acid can be removed via a line 44.

The particular benefits of a pore burner 1 in such plants are based on its outstanding capability of regulating the combustion temperature and in its combustion stability. The stabilizing effect of the hot ceramic materials in Zone C has a positive effect upon any sudden changes in the composition of the subsequently to be combusted exhaust gas. The other combustion parameters, such as natural gas and air requirement for maintaining the target temperature in the

combustion zone can quickly be adapted without interrupting the combustion . Combustion temperatures of up to 1600° C are possible with commercially available ceramic oxide aggregate.

Results of Testing the Described Method and Devices utilized therefor:

Example 1:

Hydrochloric acid was produced from hydrogen (1.12 m³/h) and chlorine (1.09 m³/h) with a pore burner 1 according to Fig. 1. In a process-engineered pilot plant according to Fig. 5.

a stream of inert gas stream was blown in as added gas for lowering the flame temperature, also 0.73 kg/h of steam was added into the pre-mix chamber. With a stoichiometric hydrogen surplus of 3%, a free chlorine contents of less than 3% was ascertained in the 30% (by weight) hydrochloric acid, which was produced by combustion.

Example 2:

An exhaust gas containing methyl-chloride was subjected to post-combustion in a pore burner 1 according to Fig. 5, in a plant according to Fig. 7, in a support flame of 0.17 m³ natural gas and 1.54 m³/h air. A post-combustion gas with approximately 0.1% methyl chloride in air was introduced as exhaust gas with 0.35 m³/h. The temperature of the exhaust gas escaping from the pore burner was at approximately 1100° C. The contents of methyl chloride in the exhaust gas was less than 12 ppm.

Example 3:

The following results were obtained in a test using a plant according to Fig. 6 and a pore burner

according to Fig. 1: Combustion of $0.12 \text{ m}^3/\text{h}$ chlorine with $0.2 \text{ m}^3/\text{h}$ natural gas (methane) and $2.8 \text{ m}^3/\text{h}$ air. Hydrochloric acid (30%) free from carbon black was produced. Contents of carbon mono-oxide was smaller than 0,5%. By-products such as polychlorinated dioxins and furans could not be ascertained in the acid nor in the exhaust gas. Chlorine contents in the acid was less than 50 ppm.

Subject to unfavorable parameters, the exhaust gas with high air excess could once more be subjected to after-combustion in a device according to Fig. 5.

Example 4:

In addition, tests were performed at greatly reduced combustion chamber temperature in a burner according to Fig. 1. Using $1.06 \text{ m}^3/\text{h}$ hydrogen, $1.04 \text{ m}^3/\text{h}$ chlorine and 1.02 kg/h steam, even with low combustion chamber temperature of approx. 600°C , there resulted only low chlorine contents in the obtained acid of less than 3 ppm.

As demonstrated by these examples, the above named burner types make it possible to basically execute, in simple fashion, highly exothermal chemical reactions, in low volume scale as well as in adiabatic manner. Safety provisions can easily be maintained. Thus, the burner type described here proves itself in all requirements vastly superior for highly exothermal chemical reactions

when compared with the traditional burners.

Claims

1. Method for a burner for combustion of a fuel/oxidant mixture (1) inside a combustion chamber, in which a material (3, 3', 3'', 3''') is provided that endures a maximum temperature which is lower than the combustion temperature of the fuel/oxidant mixture, characterized in that prior to combustion an additional gas is added, which, essentially, does not contribute to the combustion, such as an inert gas or steam, or the exhaust gas from the combustion or from after-combustion, by means of which the temperature is lowered during combustion to a value below the maximum temperature.
2. Method according to Claim 1, characterized in that the fuel/oxidant mixture and the additionally supplied gas are mixed, at least in part, in a pre-mix device (5) which is up-stream from the burner (1).
3. Device comprising a burner for combustion of a fuel/oxidant mixture within a combustion chamber in which a material (3, 3', 3'', 3''') is provided which endures a maximum temperature, with one or several supply lines (25, 26) for the fuel as well as the oxidation agent, in order to conduct these into the combustion chamber, characterized in that said combustion device with combustion temperature of fuel/oxidant mixture above the maximum temperature is designed in that at least one additional supply line (30) is provided, by means of which an additional gas, specifically of low combustion value, can be supplied, whereby the temperature during combustion can be lowered to a value below the maximum temperature.

4. Device according to Claim 3, characterized in that the combustion product from the combustion chamber is introduced, at least in part, via a supply line (30) as additional gas, by means of which the temperature can be lowered during combustion.
5. Device according to Claim 3 or 4, characterized in that a pre-mix chamber (5) is provided for the fuel/oxidant mixture, in which the fuel and the oxidant mixture can be mixed before combustion.
6. Device according to Claim 5, characterized in that the pre-mix chamber (5) is designed in such manner that in direction towards the combustion chamber, the flow velocity component of the mixture is greater in the pre-mix chamber (5) than the flame velocity in the combustion chamber.
7. Device according to Claim 5 or 6, characterized in that the pre-mix chamber (5) is also supplied with additional gas by means of which the combustion temperature can be lowered, so as to mix same with the fuel/oxidant mixture, preferably by mixing with fuel or oxidant before the pre-mix chamber (5).
8. Device according to one of Claims 5 to 7, characterized in that the size of the lateral surfaces in proportion to the volume of the pre-mix chamber (5) is selected in such manner that the side wall is able to accommodate, should the situation arise, the free energy from detonation.

9. Device according to at least one of Claims 5 to 8, characterized by cooling of the pre-mix chamber (5).
10. Device according to one of Claims 3 to 9, characterized in that there is provided in the combustion chamber a porous material (3, 3', 3", 3''') with inter-connected hollow spaces suitable in size for flame development.
11. Device according to Claim 10, characterized by a porous material (3, 3', 3", 3''') with inter-connected hollow spaces whose porosity changes over to larger pores in the direction toward the development of flame, with resulting critical Péclet number for the pore size at an inner border area, above which flame development takes place and below which flame development is suppressed.
12. Device according to Claim 11, characterized in that the combustion chamber has at least two zones (A, C) with material (3, 3', 3", 3''') of differing pore size, between which, pore size provides the critical Péclet number.
13. Device according to one of Claims 10 to 12, characterized in that the material (3, 3', 3", 3''') with inter-connected hollow spaces presents, at least in part, bulk volume of bodies as they are utilized for systematic packings in thermal separation methods, such as spheres or shell bodies.

14. Device according to Claim 13 having a border area for zones of differing porosity according to Claim 12, characterized in that a grid is provided at the border area, like a grate (13) in order to prevent discharge of the bodies from one zone into the other.
15. Device according to Claim 14, characterized in that the grid, in particular the grate (13) is cooled.
16. Device according to at least one of Claims 3 to 15, characterized in that the combustion chamber is designed for flame stability in case of over- and/or under-pressure.
17. Device according to at least one of Claims 1 to 16, characterized in that a combustion chamber insulation (9) is provided for nearly adiabatic combustion control with thermal wall effects.
18. Device according to one of Claims 1 to 17, characterized by a fixture for obtaining or segregating reaction products from the combusted fuel/oxidation agent.
19. Device according to Claim 18, characterized in that it is designed for chlorine or a chlorine-containing compound as well as hydrogen or a hydrogen-containing compounds in the fuel/oxidant mixture in order to obtain hydrochloric acid by means

of combustion and that it has a process-engineered fixture behind the combustion chamber for obtaining hydrochloric acid or muriatic acid.

20. Utilization of one of the devices according to Claim 3 to 19, and/or application of the method according to Claim 1 or 2 for purification of exhaust gases.

c:\data\2002\fe02\hmn20020.app

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
1. März 2001 (01.03.2001)

PCT

(10) Internationale Veröffentlichungsnummer
WO 01/14249 A1

- (51) Internationale Patentklassifikation⁷: C01B 7/01 (71) Anmelder und
(72) Erfinder: DURST, Franz [DE/DE]; Eichenstrasse 12,
D-91094 Langensendelbach (DE).
- (21) Internationales Aktenzeichen: PCT/EP00/06199 (72) Erfinder; und
(75) Erfinder/Anmelder (nur für US): KÜNZEL, Jürgen
[DE/DE]; Hochweg 37, D-86672 Thierhaupten (DE).
- (22) Internationales Anmeldedatum: 3. Juli 2000 (03.07.2000)
- (25) Einreichungssprache: Deutsch (74) Anwälte: HELD, Stephan usw.; Hagemann, Braun &
Held, Postfach 86 03 29, D-81630 München (DE).
- (26) Veröffentlichungssprache: Deutsch (81) Bestimmungsstaaten (national): AU, CA, NO, US.
- (30) Angaben zur Priorität: 199 39 951.4 ✓ 23. August 1999 (23.08.1999) DE (84) Bestimmungsstaaten (regional): europäisches Patent (AT,
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).
- (71) Anmelder (für alle Bestimmungsstaaten mit Aus-
nahme von US): SGL TECHNIK GMBH [DE/DE];
Werner-von-Siemens-Strasse 18, D-86405 Meitingen
(DE). TRIMIS, Dimosthenis [GR/DE]; Heimerich-
strasse 14, D-90419 Nürnberg (DE). APPLIKATIONS-
UND TECHNIKZENTRUM FÜR ENERGIEVER-
FAHRENS-, UMWELT- UND STRÖMUNGSTECH-
NIK (ATZ-EVUS) [DE/DE]; Kropfersrichterstrasse 6-8,
D-92237 Sulzbach-Rosenberg (DE).

Veröffentlicht:

— Mit internationalem Recherchenbericht.

Zur Erklärung der Zweibuchstaben-Codes, und der anderen
Abkürzungen wird auf die Erklärungen ("Guidance Notes on
Codes and Abbreviations") am Anfang jeder regulären Ausgabe
der PCT-Gazette verwiesen.

(54) Title: METHOD FOR A BURNER AND A CORRESPONDING DEVICE

(54) Bezeichnung: VERFAHREN FÜR EINEN BRENNER UND EINE ENTSPRECHENDE VORRICHTUNG

(57) Abstract: The invention relates to a device equipped with a burner for combusting a fuel/oxidant mixture inside a combustion chamber in which a material (3, 3', 3'', 3''') is provided that endures a maximum temperature. The inventive device also comprises one or more supply lines (25, 26) for the fuel as well as for the oxidant which are provided for supplying the same into the combustion chamber. The inventive device is characterized in that it is designed for carrying out a combustion with a combustion temperature of the fuel/oxidant mixture that exceeds the maximum temperature. The device is designed in such a way that at least one additional supply line (30) is provided via which an additional gas having, in particular, a low calorific value can be supplied to the combustion chamber. Said additional gas enables the temperature during combustion to be lowered to a value that is less than the maximum temperature.

(57) Zusammenfassung: Eine Vorrichtung mit einem Brenner zur Verbrennung eines Brennstoff/Oxidationsmittelgemisches inner-
halb eines Brennraums, in dem ein Material (3, 3', 3'', 3''') vorgesehen ist, das einer maximalen Temperatur standhält, mit einer oder
mehreren Zuführungsleitungen (25, 26) für den Brennstoff sowie für das Oxidationsmittel, um sie in den Brennraum einzuleiten, ist
dadurch gekennzeichnet, dass sie für die Verbrennung mit einer Verbrennungstemperatur des Brennstoff/Oxidationsmittelgemisches
oberhalb der maximalen Temperatur dadurch ausgelegt ist, dass mindestens eine weitere Zuleitung (30) vorgesehen ist, über die dem
Brennraum ein zusätzliches Gas, insbesondere niederen Brennwertes, zuführbar ist, mit dem die Temperatur bei der Verbrennung
auf einen Wert unterhalb der maximalen Temperatur absenkbar ist.

WO 01/14249 A1

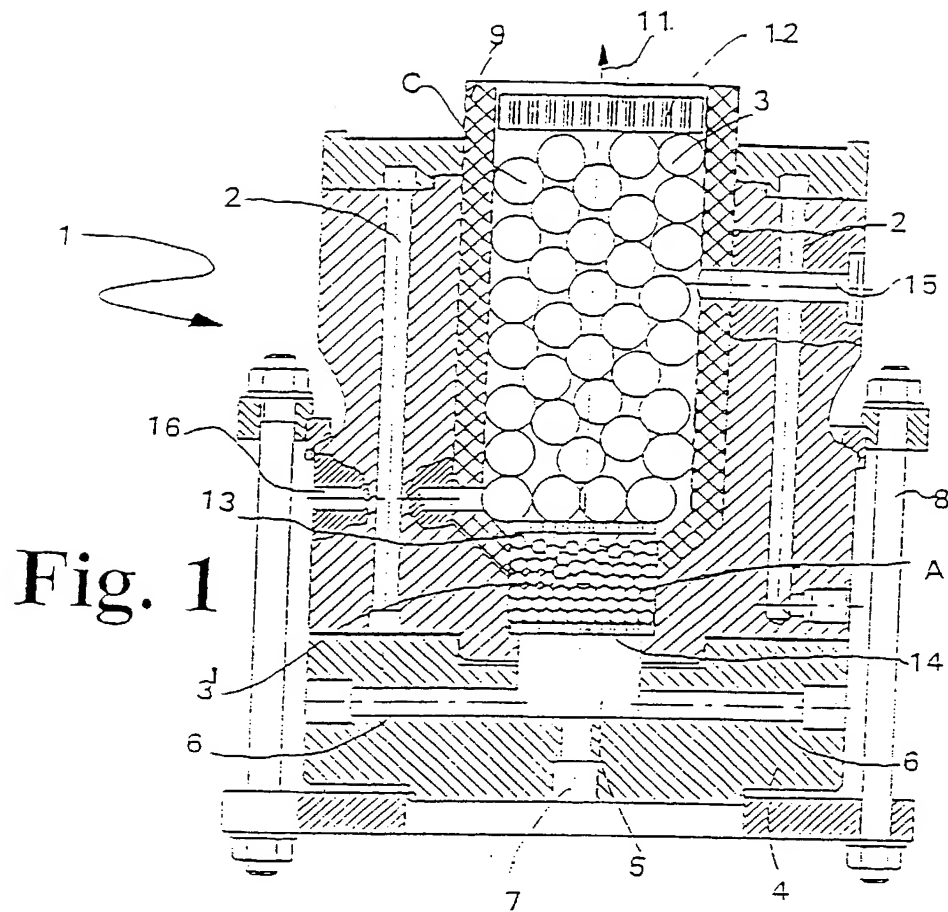


Fig. 1a

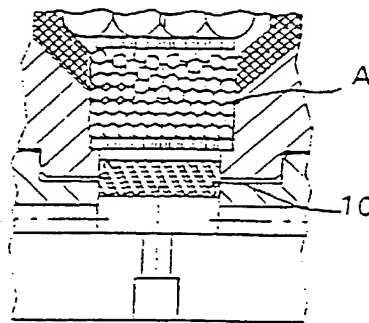


Fig. 2

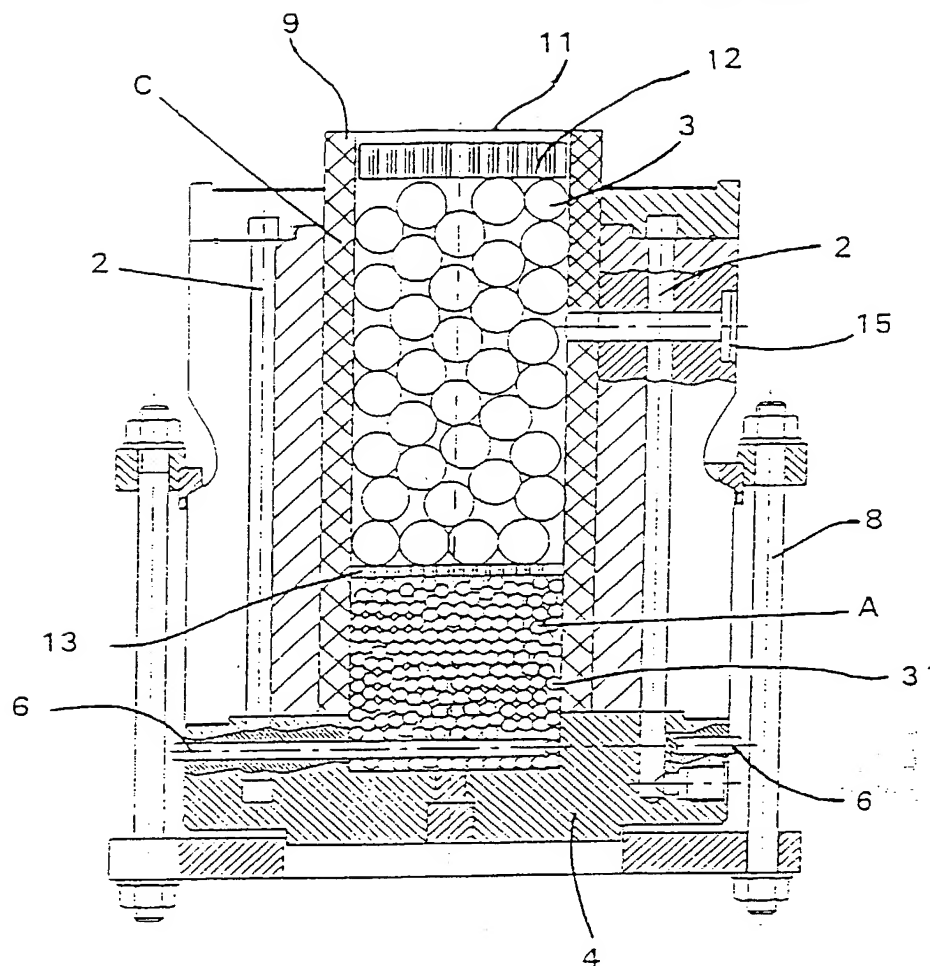
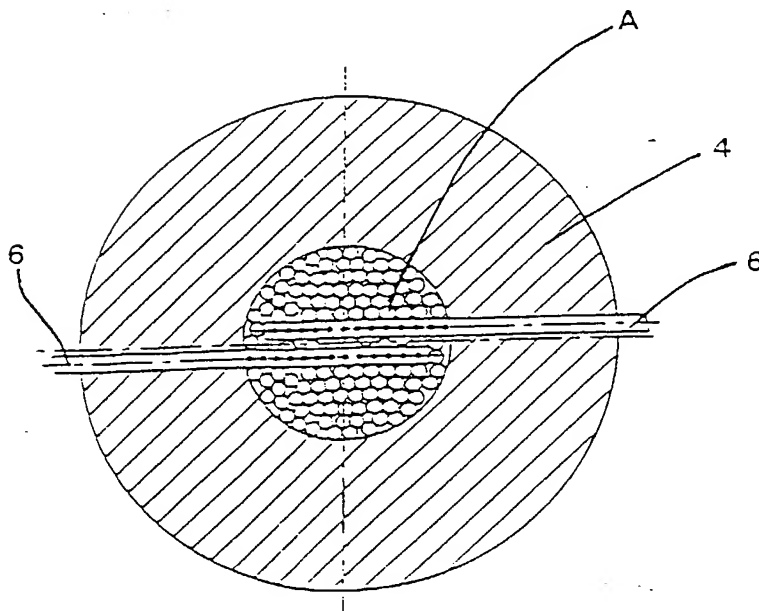


Fig. 2a



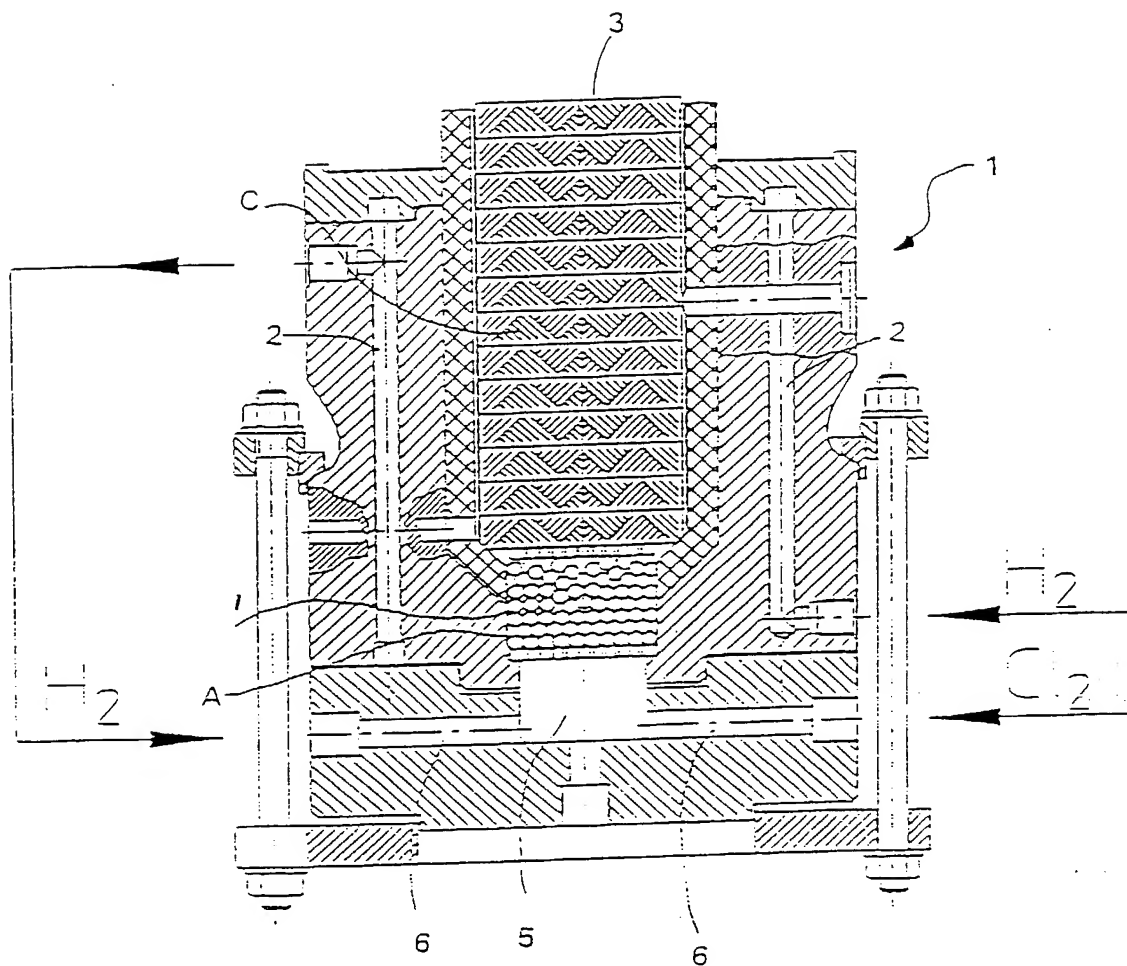


Fig. 3

WO 01/14249

PCT/EP00/06199

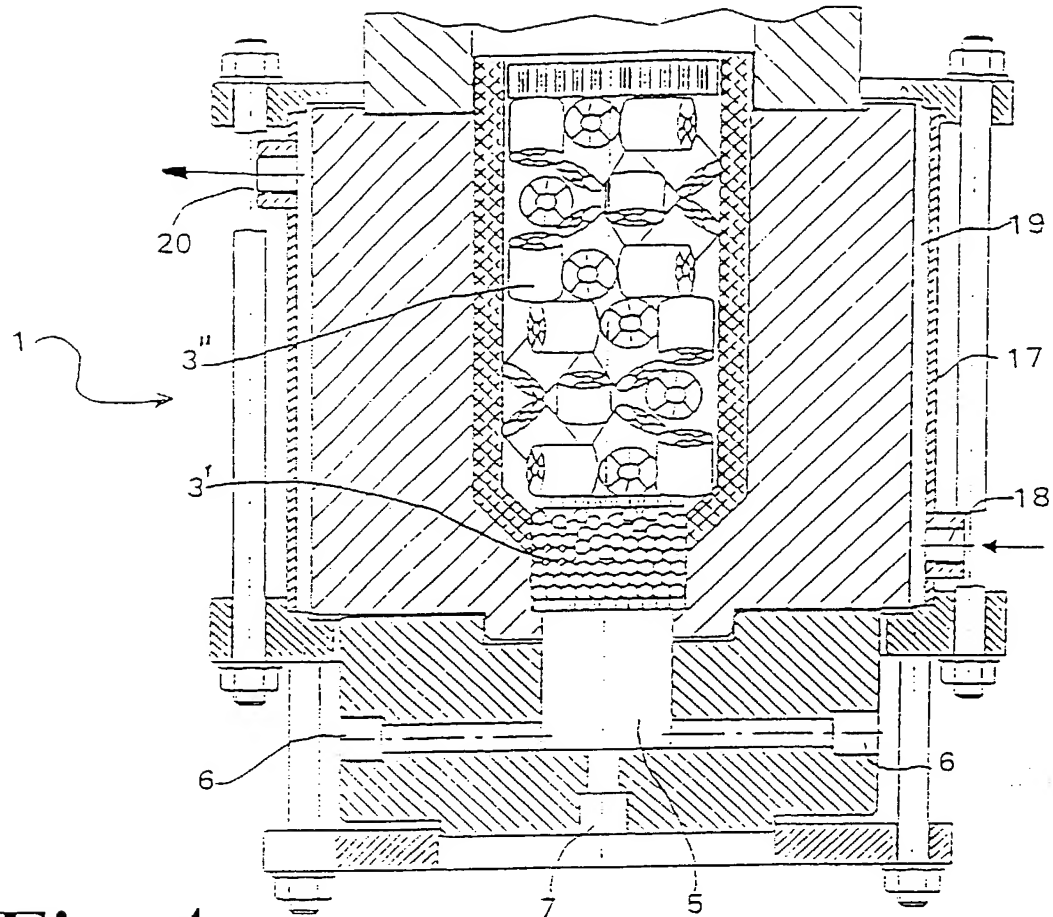


Fig. 4

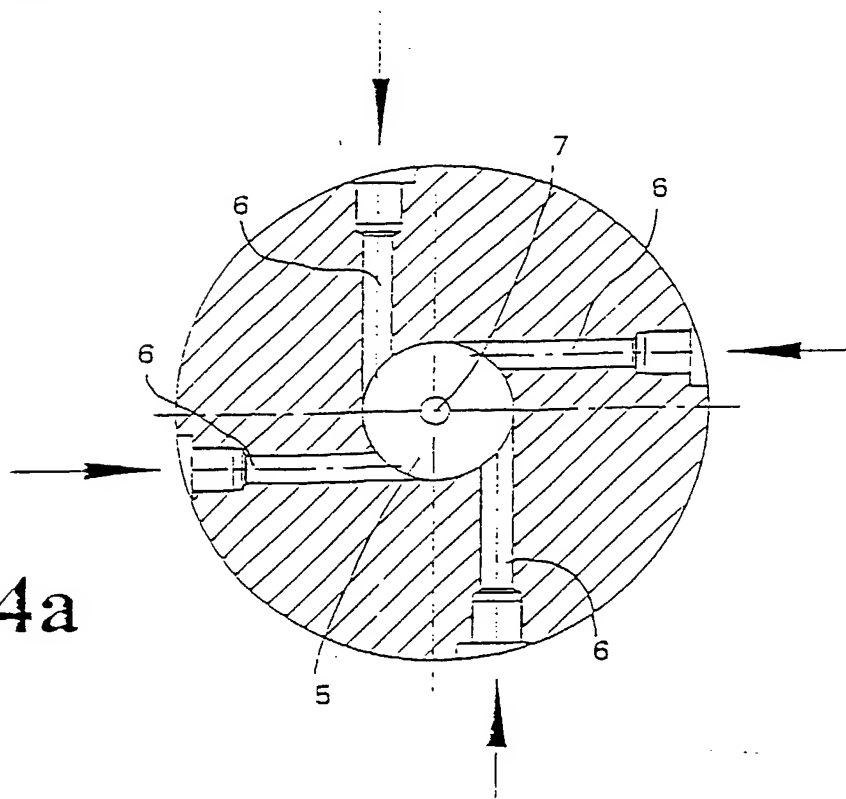


Fig. 4a

WO 01/14249

PCT/EP00/06199

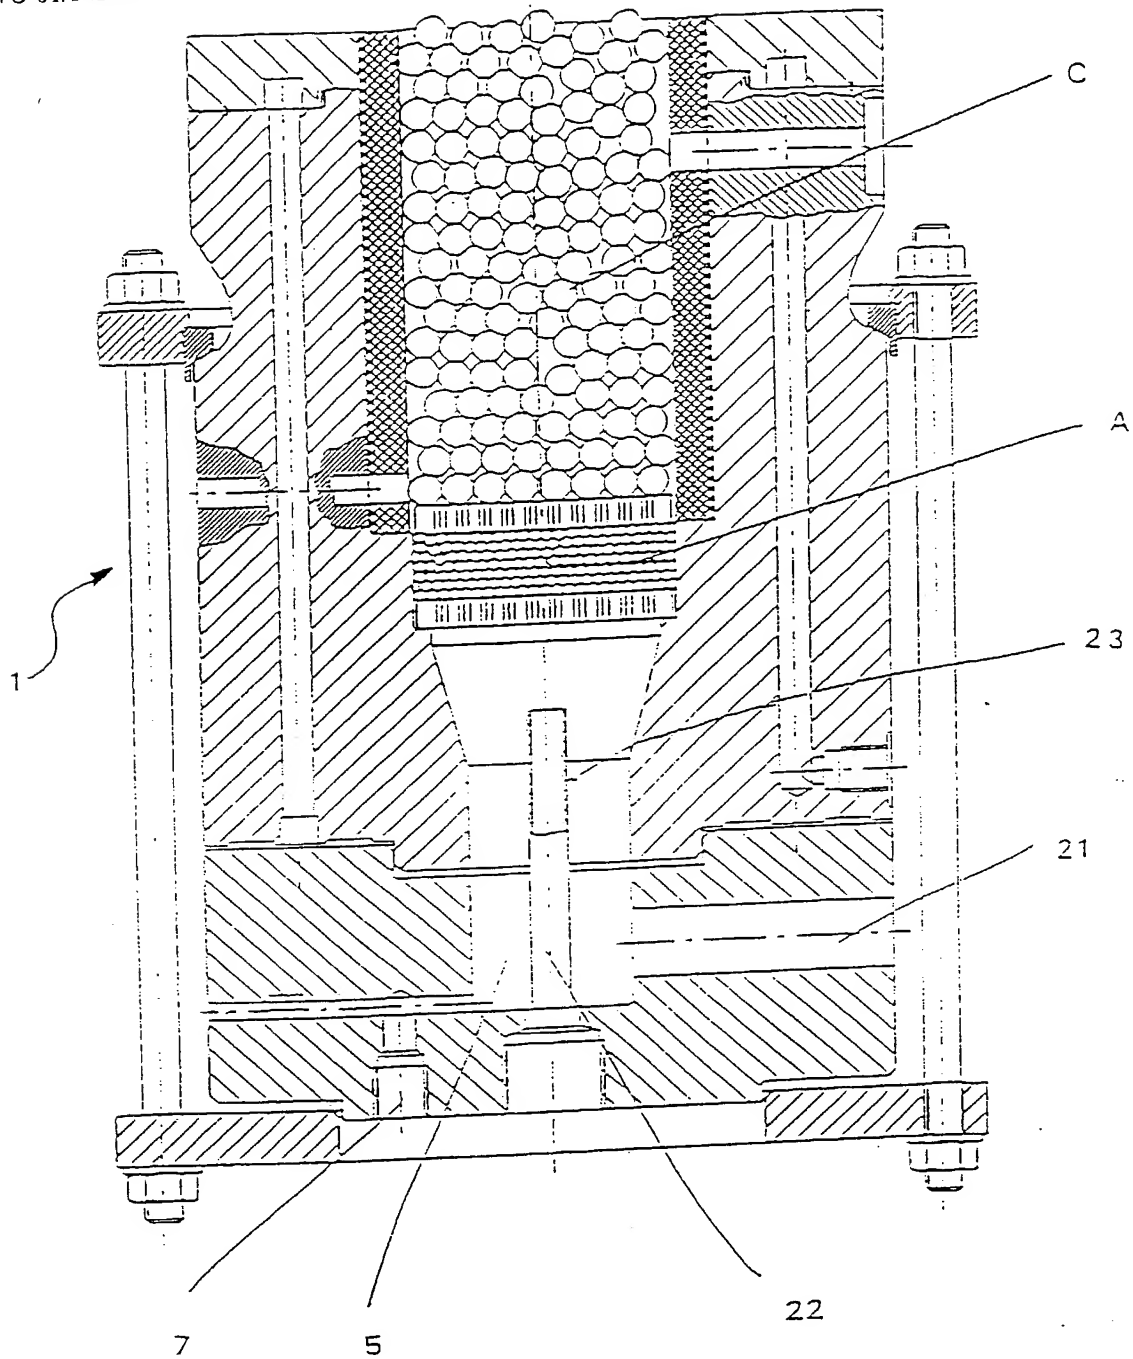


Fig. 5

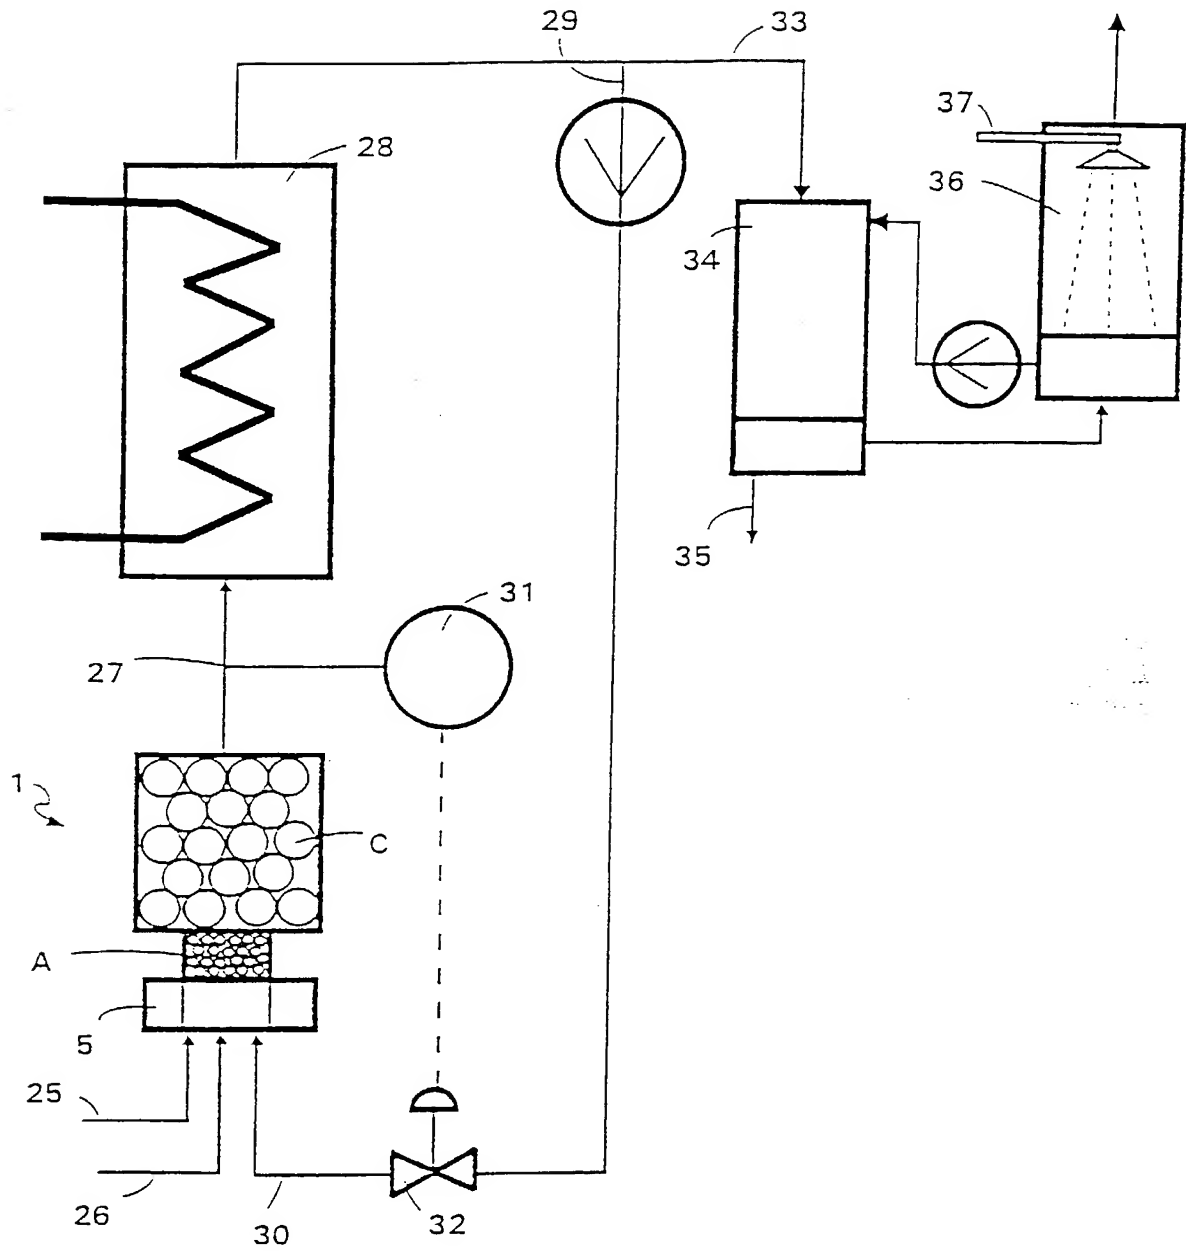


Fig. 6


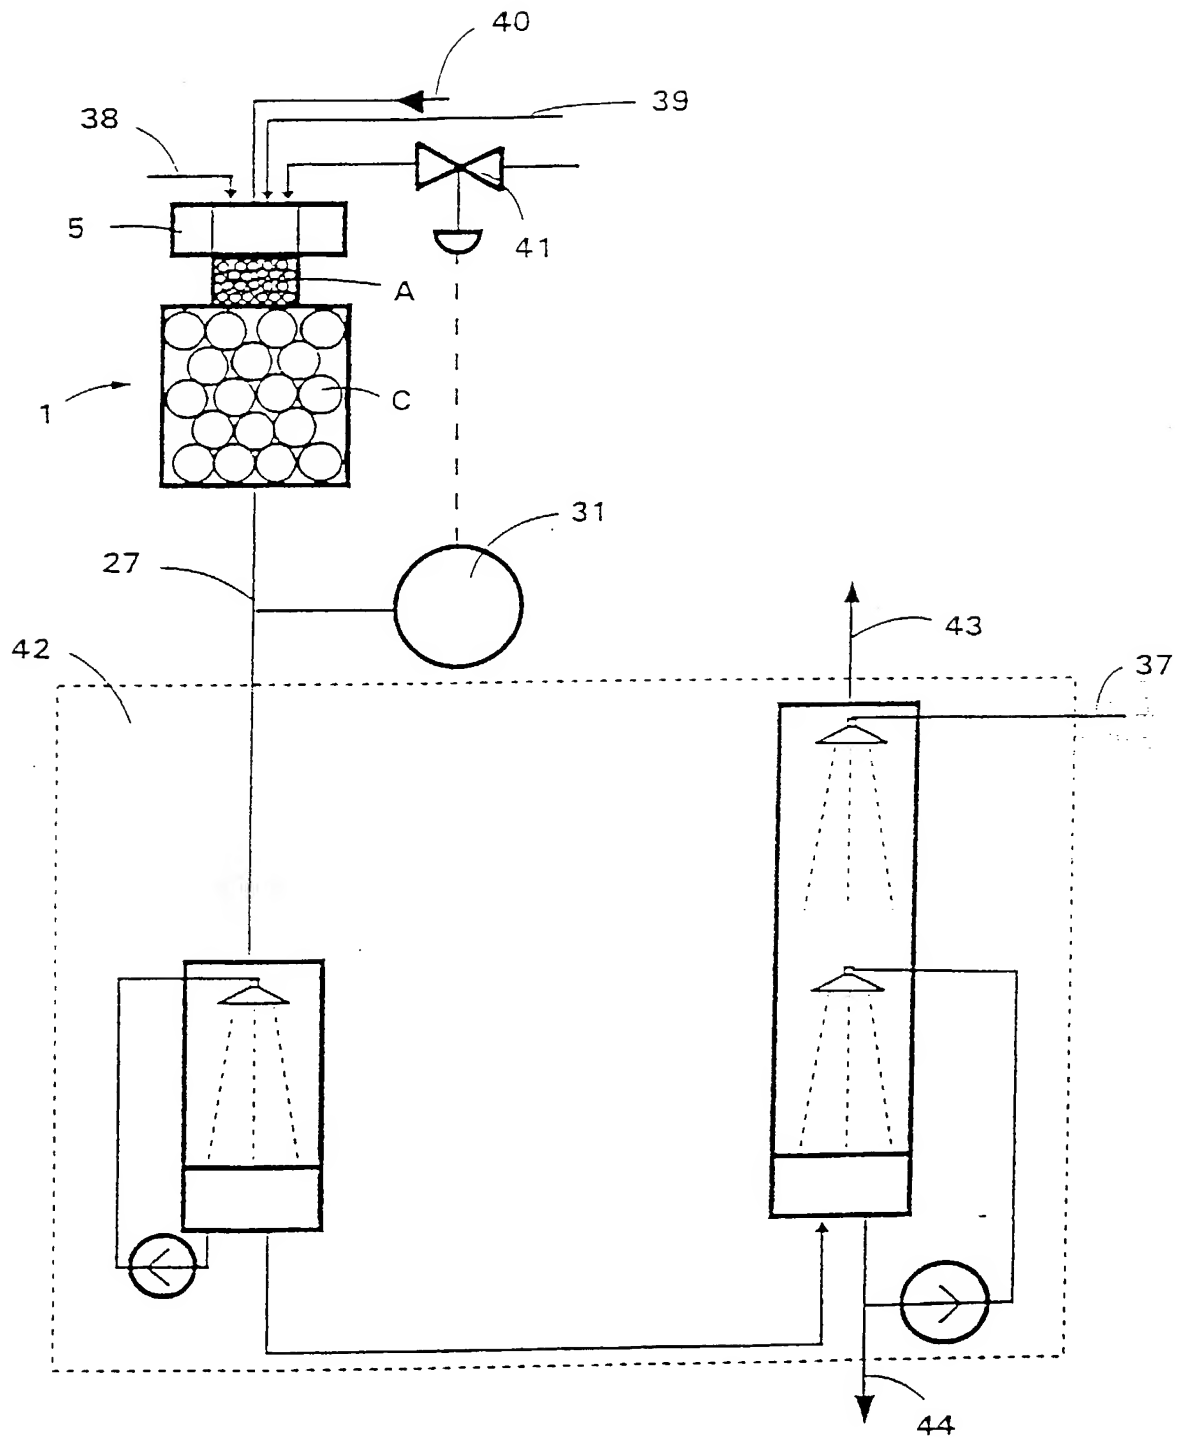


Fig. 7



Attorney Docket No. HMN 2 0020

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor(if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR A BURNER AND A CORRESPONDING DEVICE

the specification of which

[] is attached hereto

[X]

was filed on February 22, 2002

Application Serial No. 10/069,261

and was amended on

(if applicable)

[] as filed as

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code, 119 or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed above and have also identified below, by check the box, any foreign application(s) for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application

199 39 951.4
(Number)

Germany
(Country)

23 August 1999
(Day/Month/Year Filed)

No
Certified Copy Attached?

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application No(s) (Day/Month/Year Filed) [] additional provisional application numbers are listed on a supplemental priority data sheet attached

I hereby claim the benefit under Title 35, United States, 120 of any United States application(s) or any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information which is material to patentability as defined in Title 37, of Federal Regulations Code, 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

PCT/EP00/06199
U.S. Parent Application
or PCT Parent Number

July 3, 2000
Parent Filing Date
(MM/DD/YYYY)

Parent Patent Number
(If Applicable)



Attorney Docket No. HMN 2 0020

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Mark E. Bandy,	Reg. No. <u>35,788</u>	Scott A. McCollister,	Reg. No. <u>33,961</u>
Brian G. Bembenick,	Reg. No. <u>41,463</u>	James W. McKee,	Reg. No. <u>26,482</u>
John P. Cornely,	Reg. No. <u>41,687</u>	Richard J. Minnich,	Reg. No. <u>24,175</u>
David B. Cupar,	Reg. No. <u>47,510</u>	Jay F. Moldovanyi,	Reg. No. <u>29,678</u>
Joseph D. Dreher,	Reg. No. <u>37,123</u>	Philip J. Moy,	Reg. No. <u>31,280</u>
Matthew P. Dugan,	Reg. No. <u>44,663</u>	Timothy E. Nauman,	Reg. No. <u>32,283</u>
Christopher B. Fagan,	Reg. No. <u>22,987</u>	Erik J. Overberger,	Reg. No. <u>48,556</u>
Patrick D. Floyd,	Reg. No. <u>39,671</u>	Scott C. Rand,	Reg. No. <u>40,359</u>
Jude A. Fry,	Reg. No. <u>38,340</u>	Patrick R. Roche,	Reg. No. <u>29,580</u>
Steven M. Haas,	Reg. No. <u>37,841</u>	James E. Scarbrough,	Reg. No. <u>47,056</u>
Michael E. Hudzinski,	Reg. No. <u>34,185</u>	Ann M. Skerry,	Reg. No. <u>45,655</u>
Edward T. Kennedy,	Reg. No. <u>48,478</u>	Mark S. Svat,	Reg. No. <u>34,261</u>
Richard M. Klein,	Reg. No. <u>33,000</u>	Joseph E. Waters,	Reg. No. <u>50,427</u>
Thomas E. Kocovsky,	Reg. No. <u>28,383</u>	Jason A. Worgull,	Reg. No. <u>48,044</u>
Sandra M. Koenig,	Reg. No. <u>33,722</u>		

SEND CORRESPONDENCE TO: Fay, Sharpe, Fagan, Minnich & McKee, LLP 1100 Superior Avenue, 7th Floor Cleveland, OH 44114-2518	DIRECT TELEPHONE CALLS TO: (name and telephone number) Scott A. McCollister (216) 861-5582
--	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of joint or first joint inventor: DURST, Franz

Inventor's Signature: [Signature]
Residence: Langensendelbach, Germany
Country of Citizenship: Germany

Date: 15.07.2002
Post Office Address: Eichenstrasse 12
D-91094 Langensendelbach
Germany

Full name of joint or second joint inventor: KUNZEL, Jürgen

Inventor's Signature: [Signature]
Residence: Thierhaupten Germany
Country of Citizenship: Germany

Date: 12.07.2002
Post Office Address: Hochweg 37
D-86672 Thierhaupten
Germany